


Outdoor Receiver WV-RC150



- Outdoor receiver unit for pan/tilt mechanism
- Supplies 24V AC to a camera and a pan/tilt mechanism

DIMENSIONS

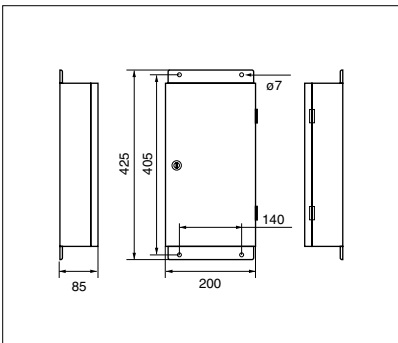

SPECIFICATIONS

Power Source	WV-RC150/B: 230/240V AC 50Hz WV-RC150/G: 230V AC 50Hz
Power Consumption	220W
Input Signal/Camera Input	1V(p-p)/75 Ω (Multiplexed video and control data signal) (BNC connector)
Mic Input	600 Ω Balanced, -78dBV (1/4-type phone jack) (possible to use 600 Ω Unbalanced)
Output Signal /Video Output	1V(p-p)/75 Ω (Multiplexed FM audio, video and control data signal)(BNC connector)
Audio Output	-10dBV (at load impedance 10kΩ)
Speaker Output	1W with 8 Ω, (maximum)
Control Terminal	Aux-1: 250V AC, 3.5A cosφ= 0.4 (Power factor) Aux-2: 250V AC, 3.5A cosφ= 0.4 (Power factor)
Lens Voltage Supply	6V DC or 12V DC switchable (Fine adjustable)
Ambient Operating Temperature	-30°C - +50°C
Ambient Operating Humidity	Less than 95%
Dimension (W x H x D)	200 x 85 x 425 mm
Weight	8.3 kg