

## ◆ Double Feed Detect Area Settings - Intelligent Double-Feed Detection

<Function>

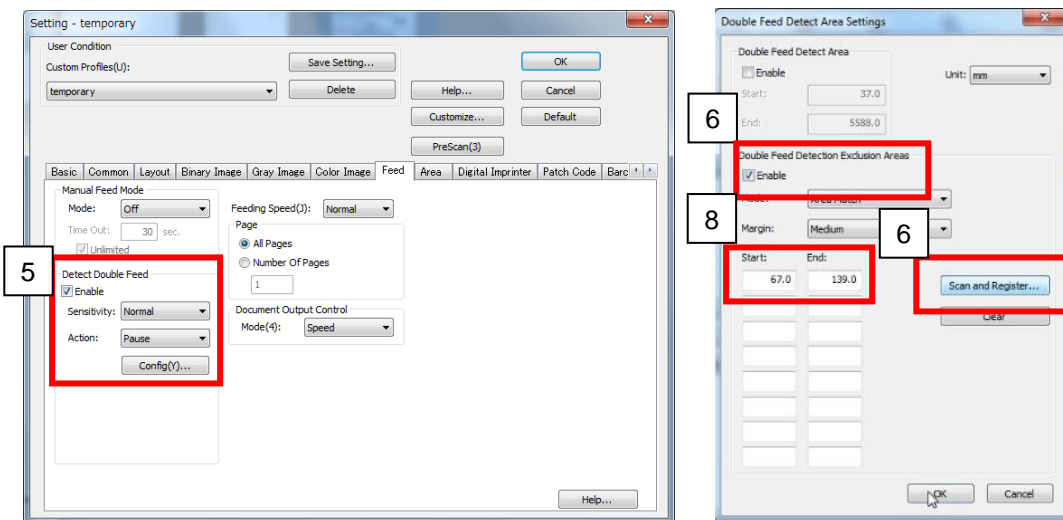
You can set which areas to detect double feeds in and which areas to not detect double feeds in (in portrait orientation).



【Demo Document】



<ICP Setting Procedures>

Refer to



1. Click "Scan"  at the left side. The "New Document – Scan" dialog box is displayed.
2. Click "Scan Setting" .
3. Select "24 bit Color" in "Image Type".
4. Select "Feed" tab.
5. Click "Config" in "Detect Double Feed" and "Double Feed Detect Area Settings" is displayed
6. Check "Enable".
7. Set the document.
8. Click "Scan and Register".
9. An Exclusion Area is set to one set of "Start" and "End".
10. Click "OK" and click "OK"
11. Click the "Start" button to begin scanning.  
Double-feed is not detected.

<Notes>

- This function cannot be used with some scanners.