

出力の照度依存特性


REFERENCE

Dependence of Output on Illumination

1.Model AM-1522

2.Outside Dimension : 55.0mm × 40.5mm

FL:White Fluorescent Light

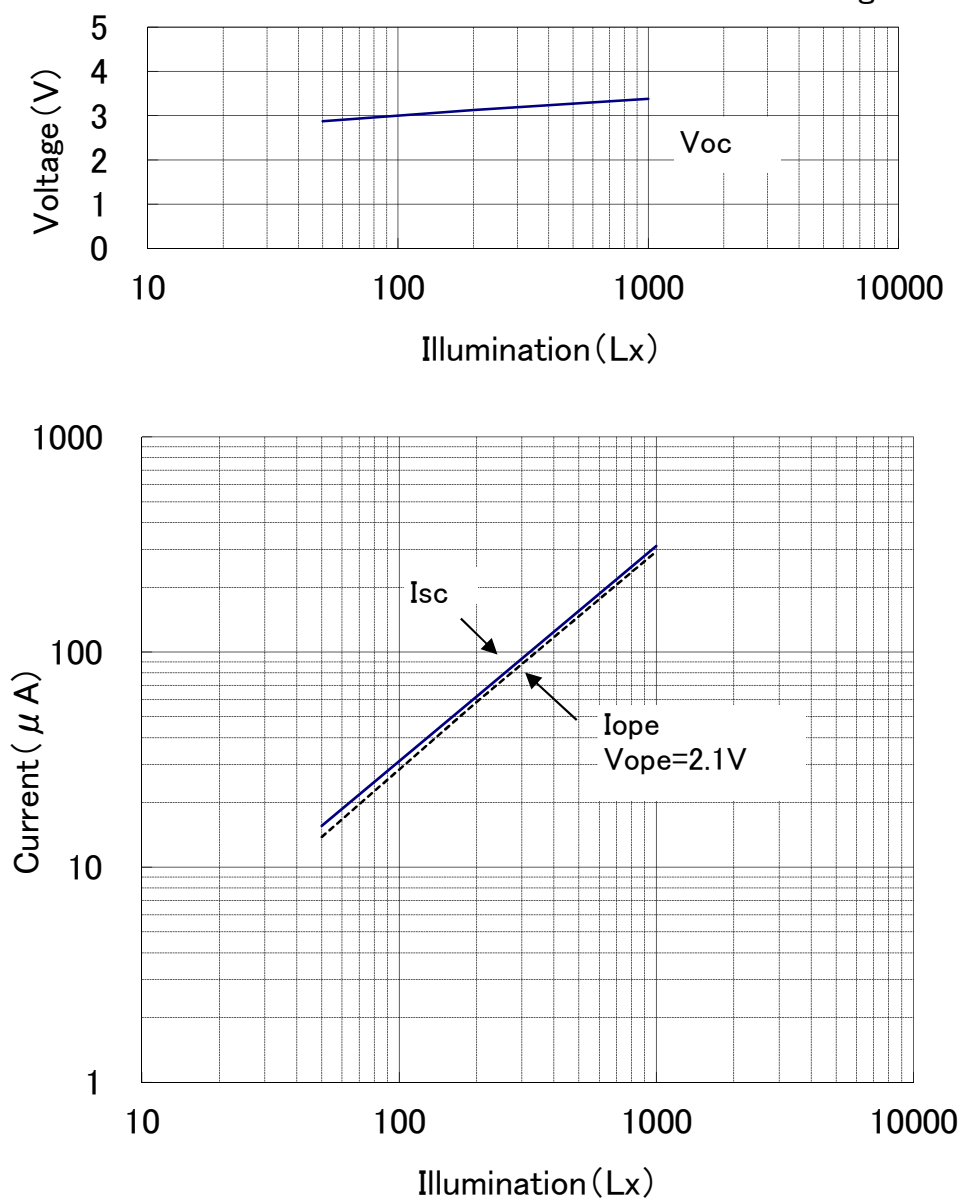

*このデータは標準的な出力特性を示すものであり、特性を保証するものではありません。

*The data are meant to show standard electric characteristics only , not intended to guarantee the characteristics.


I—V Characteristics

REFERENCE

1.Model : AM-1522

2.Outside Dimension : 55.0mm × 40.5mm

FL:White Fluorescent Light

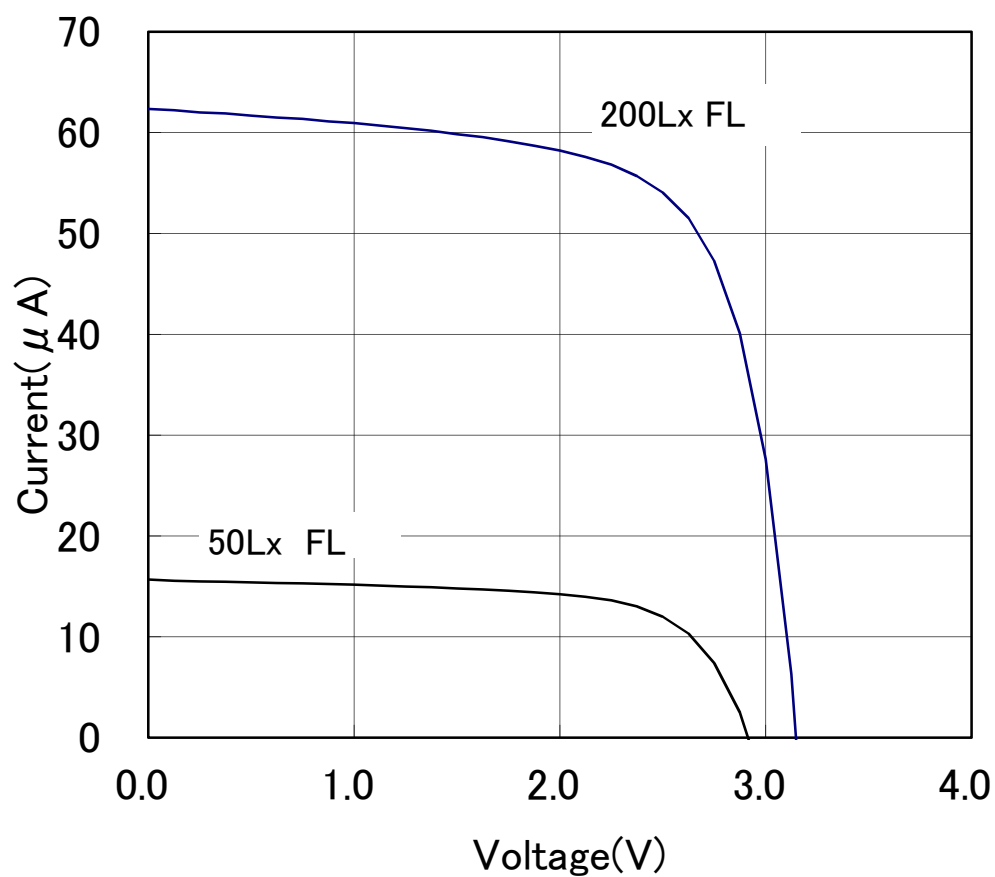

*このデータは標準的な出力特性を示すものであり、特性を保証するものではありません。

*The data are meant to show standard electric characteristics only , not intended to guarantee the characteristics.

出力の温度依存特性



REFERENCE

Dependence of Output on Temperature

1.Model : AM-1522

2.Outside Dimension : 55.0mm × 40.5mm

at 200Lx White Fluorescent Light

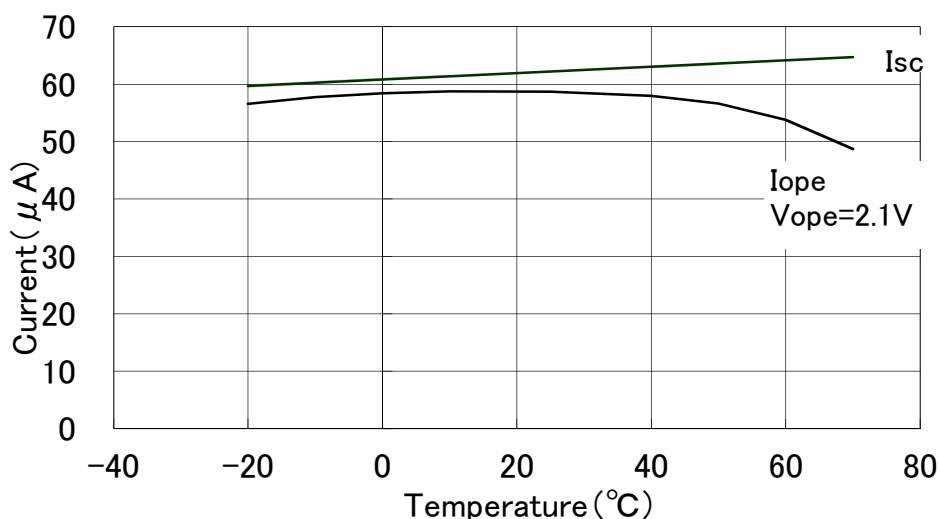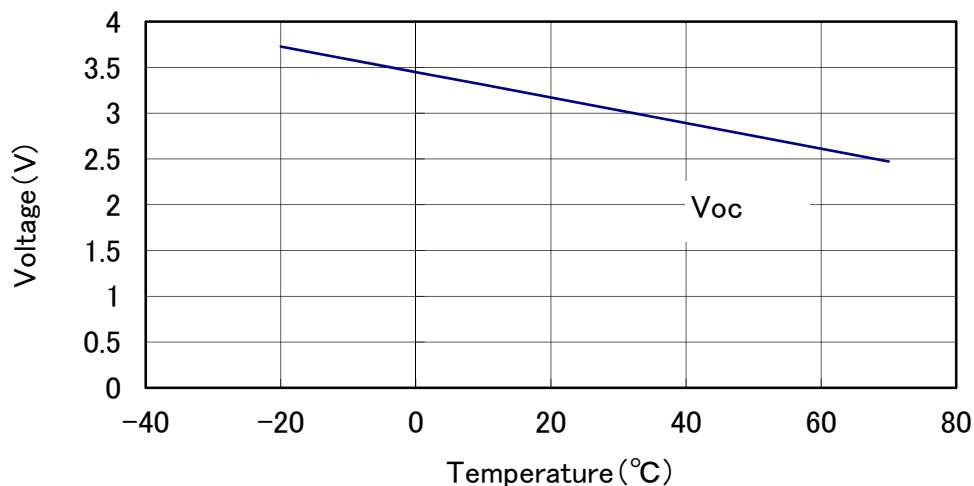

*このデータは標準的な出力特性を示すものであり、特性を保証するものではありません。

*The data are meant to show standard electric characteristics only , not intended to guarantee the characteristics.

Panasonic Solar Amorton Co.,Ltd.


2019/4/25

Model : AM-1522C

1. Outside dimensions 外形寸法

Light Receiving Side (受光面)

Overcoat Side (オーバーコート面)

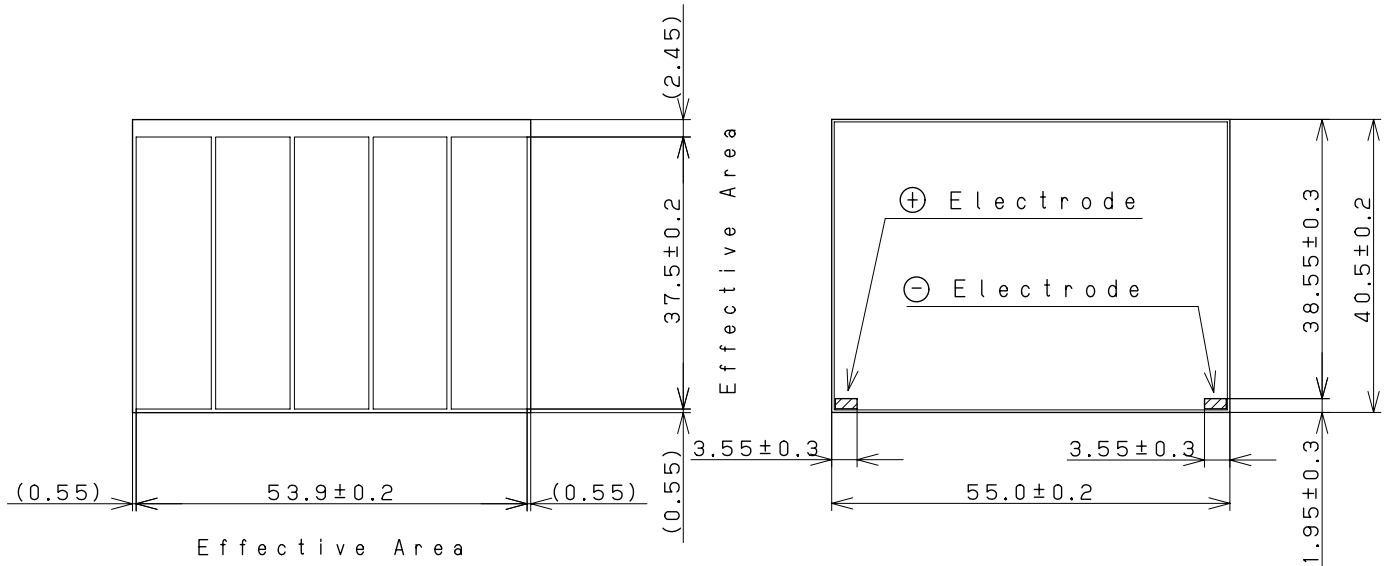

(dimension:mm)

Note

Glass Substrate Thickness (ガラス基板厚) : $1.1\text{mm} \pm 0.1$ Module Thickness (モジュール厚) : 1.3mm MAX

Accepts normal soldering for bending

(一般の半田を使用してリート*線付けが可能です。)

2. Rated Specifications (at 25℃)


Item	Specifications (Initial)		
2.1 Open circuit voltage: Voc 開放電圧	Typical	3.1V	at 200Lx FL
2.2 Short circuit Current: Isc 短絡電流	Typical	62.2 μ A	at 200Lx FL
2.3 Operating Voltage & Operating Current: Vope-lope 動作特性	Typical	2.1V - 14.2 μ A	at 50Lx FL
	Minimum	2.1V - 45.5 μ A	at 200Lx FL
	Typical	2.1V - 58.7 μ A	at 200Lx FL
2.5 Working temperature range: Topr 動作温度範囲	-10 to 60℃		
2.6 Storage temperature range: Tstg 保存温度範囲	-20 to 70℃		
2.7 Working illuminance range 使用照度範囲	~1000Lx		

FL: White Fluorescent Light


Model : AM-1522CA

1. Outside dimensions 外形寸法

Light Receiving Side (受光面)

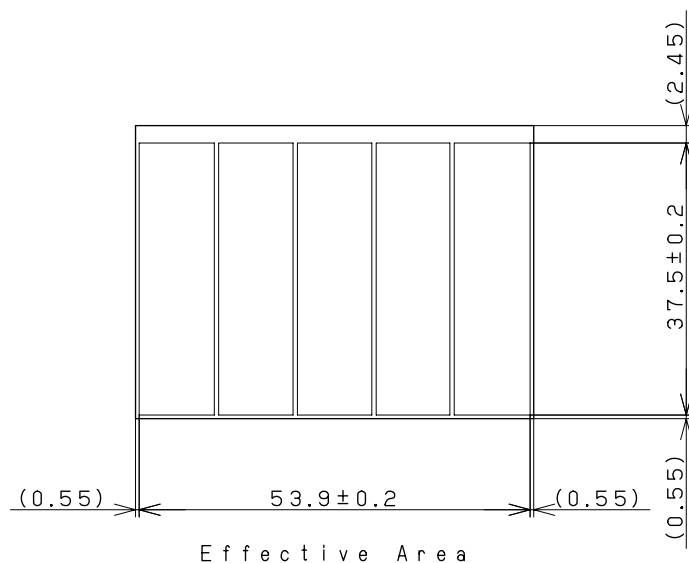

Overcoat Side (オーバーコート面)

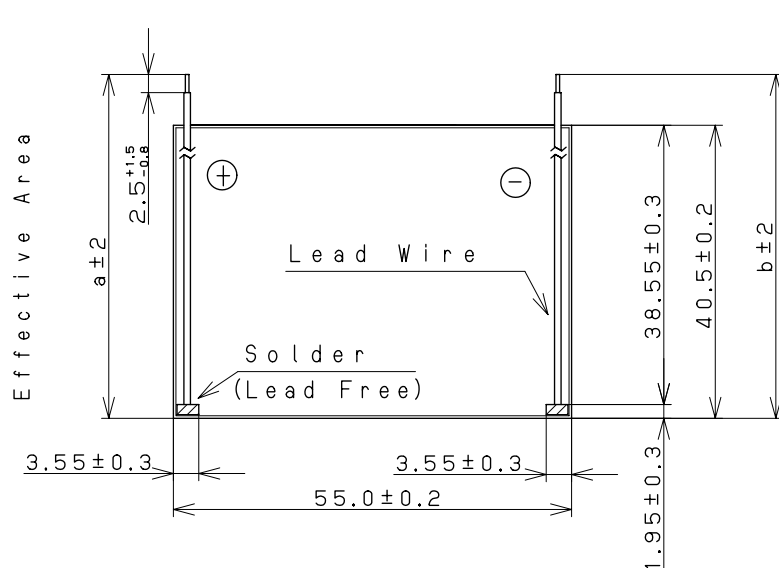

(dimension:mm)

Lead Wires : AWG30	
a:51	b:51

Note

Glass Substrate Thicknee (ガラス基板厚) : 1.1mm±0.1

Module Thickness (モジュール厚) : 1.3mmMAX

Wire-Solder thickness: 2.5mmMAX (including Module)
(リード線半田付け部厚)

2. Rated Specifications (at 25℃)

Item	Specifications (Initial)
2.1 Open circuit voltage: Voc 開放電圧	Typical 3.1V at 200Lx FL
2.2 Short circuit Current: Isc 短絡電流	Typical 62.2μA at 200Lx FL
2.3 Operating Voltage & Operating Current: Vope-lope 動作特性	Typical 2.1V -14.2μA at 50Lx FL
	Minimum 2.1V -45.5μA at 200Lx FL
	Typical 2.1V -58.7μA at 200Lx FL
2.5 Working temperature range: Topr 動作温度範囲	-10 to 60℃
2.6 Storage temperature range: Tstg 保存温度範囲	-20 to 70℃
2.7 Working illuminance range 使用照度範囲	~1000Lx

FL: White Fluorescent Light