



FactoryLine 20

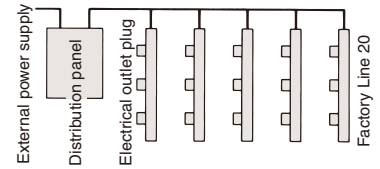

The Factory Line 20 is a duct for small-scale branching capable of providing one single-phase power supply circuit.

The Factory Line 20 is a duct for small-scale branching. It is ideal for providing the power supply for task lamps and electrical outlets, and lighting can also be installed.

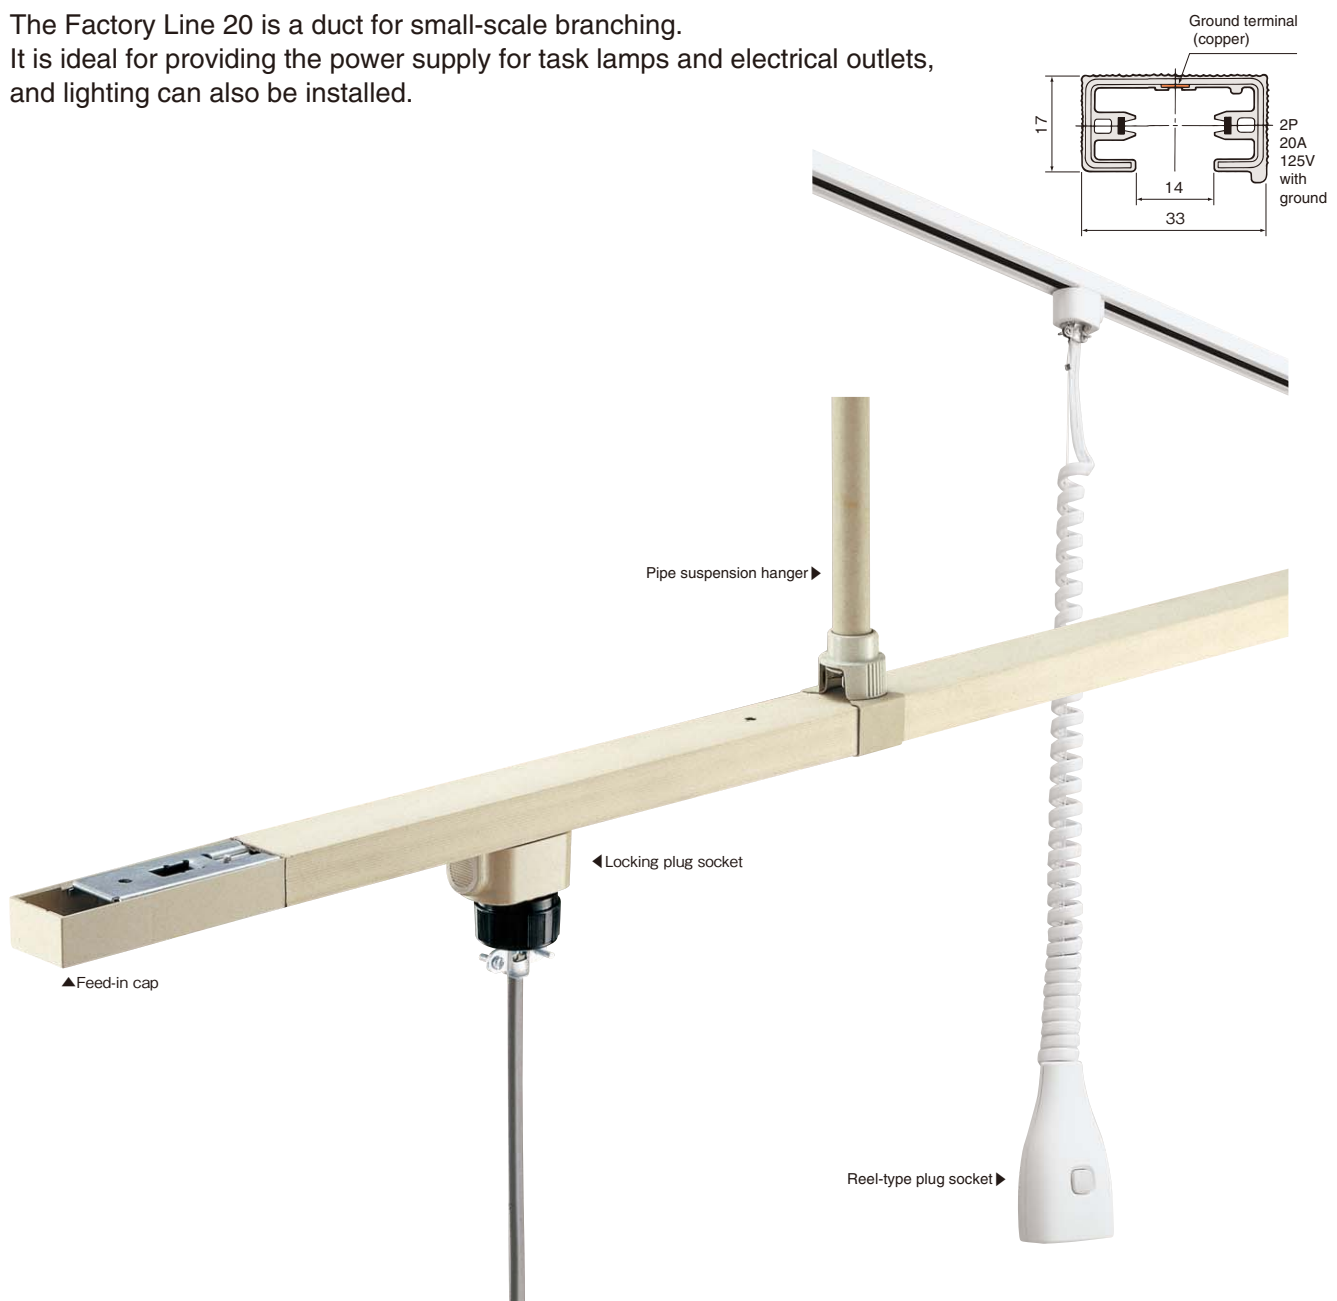




■ For the display of work standards sheets, process charts, parts lists, self-guided tour route indications, etc.



●Poster clip

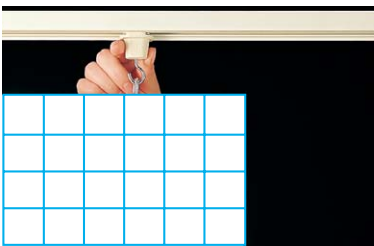


●Hanging hook

■ A power supply for measuring instruments, electric tools, and similar devices



●Locking plug socket

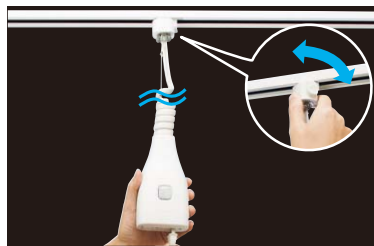

●Reel-type plug socket

■ For installing lighting fittings
You can also install Panasonic LED light bar.
The look is simple & sophisticated.



Factory Line 20 main unit


JIS C 8366 Ⓧ Ⓟ

2P 20A 125V with ground.

Conductor equipped duct for a single-phase circuit.

[Caution]

Do not attach the plug unit with the place where the tapping screw were mounted.

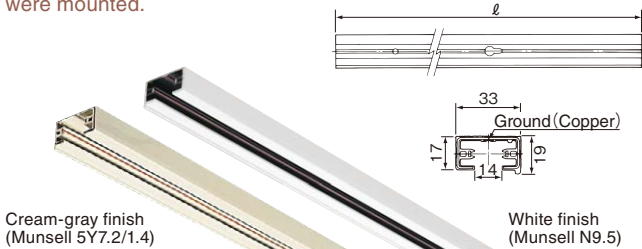

Cream-gray finish
(Munsell 5Y7.2/1.4)


White finish
(Munsell N9.5)

Cat. No.	Color	Length l (mm)	Weight (kg)
DH2611	Cream gray	1,000	0.79
DH2612		2,000	1.58
DH2613		3,000	2.37
DH2611W	White	1,000	0.79
DH2612W		2,000	1.58
DH2613W		3,000	2.37

Duct cover

Protect from entering foreign bodies or dusts into main unit.

Length 1000mm. Made of PVC.

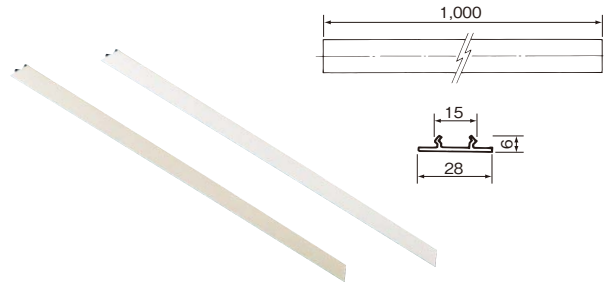

Cat. No.	Color	Weight (kg)
DH2699	Cream gray	0.08
DH2699W	White	0.08


Feed-in cap

JIS C 8366 Ⓧ Ⓟ

2P 20A 125V with ground.

Supplying power at an end of the main unit.

Internal quick connect terminals for single core wire.

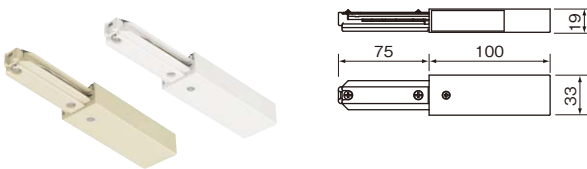

Cat. No.	Color	Weight (kg)
DH2621K1	Cream gray	0.11
DH2621K1W	White	0.11


Center feed-in joiner

JIS C 8366 Ⓧ Ⓟ

2P 20A 125V with ground.

Supplying power between the main units and connecting them.

Internal quick connect terminals for single core wire.

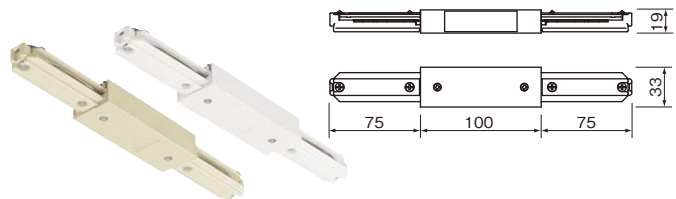

Cat. No.	Color	Weight (kg)
DH2622K1	Cream gray	0.19
DH2622K1W	White	0.19


Joiner

JIS C 8366 Ⓧ Ⓟ

2P 20A 125V with ground.

Connecting main units both physically and electrically.

Cannot supply power with this part.

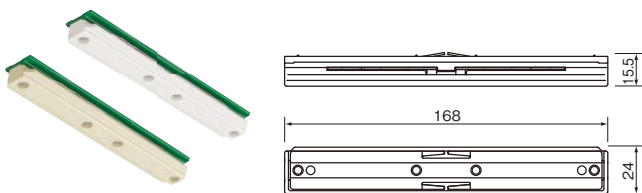

Cat. No.	Color	Weight (kg)
DH2631K1	Cream gray	0.1
DH2631K1W	White	0.1

L joiners (with feed-in terminal)


JIS C 8366 Ⓧ Ⓟ

2P 20A 125V with ground.

Connecting main unit to L-shapes. With feed-in terminal.

[Caution]


You cannot use joiners to layout cranks.

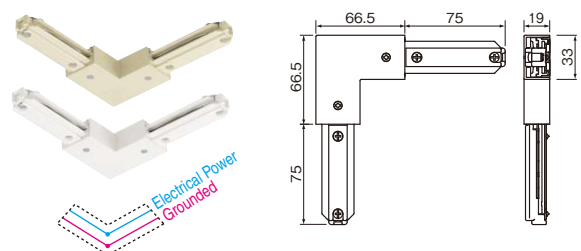

Cat. No.	Color	Weight (kg)
DH2632K1	Cream gray	0.19
DH2632K1W	White	0.19

End cap

JIS C 8366 \downarrow FS
Closing an end of the main unit.

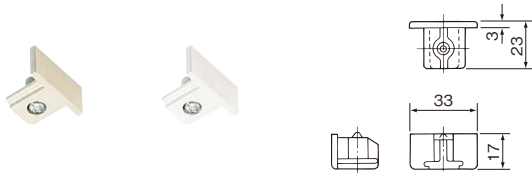

Cat. No.	Color	Weight (kg)
DH2623	Cream gray	0.006
DH2623W	White	0.006

Hanger (without bolt)


Suspending main unit directly from the building structure, or when the hanger bolts ($\ell=200$) are insufficient.
Stainless steel hanger.
[Caution]
Suspending weight must be below 98N(10kgf) on each hanger.



Cat. No.	Color	Weight (kg)
DH2652	Cream gray	0.03
DH2652W	White	0.03

Locking plug socket (cream-gray finish)

JIS C 8366 \downarrow FS
2P 15A 125V.
Use for extracting single-phase 100V socket power.

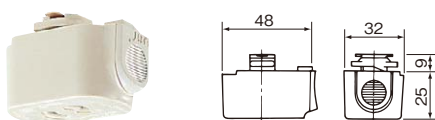

Cat. No.	Rating	Weight (kg)
DH2671	2P15A125V	0.04

Pipe suspension hanger


Suspending main unit.
The pipe can be cut at the flange side.
Support intervals : Shorter than 1.5m.
[Caution]
Suspending weight must be below 98N(10kgf) on each hanger.



Cat. No.	Color	Weight (kg)
DH2650	Cream gray	0.31
DH2650W	White	0.31

Terminal plug (with ground)


JIS C 8366 \downarrow FS
2P 15A 125V with ground.
Use for extracting single-phase power supply.

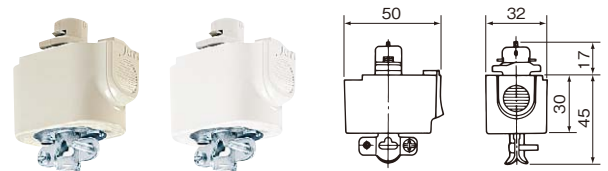

Cat. No.	Color	Rating	Weight (kg)
DH2683	Cream gray	2P15A125V with ground	0.05
DH2683W	White	2P15A125V with ground	0.05

Plug socket (with ground) (cream-gray finish)

JIS C 8366 \downarrow FS
Ground 2P 15A 125V.
Use for extracting single-phase 100V socket power.

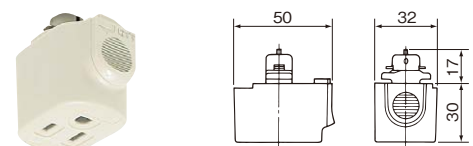

Cat. No.	Rating	Weight (kg)
DH2670	Ground 2P15A125V	0.04

Locking plug socket (with ground)

JIS C 8366 ⚡⚡
 Ground 2P 15A 125V locking.
 Use for extracting single-phase 100V socket power.



Cat. No.	Color	Rating	Weight (kg)
DH2684	Cream gray	Ground 2P15A125V locking	0.04
DH2684W	White	Ground 2P15A125V locking	0.04

Reel-type plug socket (with ground)(white finish)

JIS C 8366 ⚡⚡
 For twin ground 2P 15A 125V, twin ground 2P 15A 125V locking.
 Single-phase 100V socket power can be lowered to hand level (max. 1.8m from the duct). Lowering up to 3m □ from the duct available to order.

[Caution]

- ① To rewind the reel section, press and hold the button, and slowly raise the socket. Failure to do so may cause damage.
- ② Use within the indicated load carrying capacity (up to 1500W).



Cat. No.	Rating	Weight (kg)
DH26751W	For twin ground 2P15A125V	0.7
DH26771W	For twin ground 2P15A125V locking	

Hanging hook (cream-gray finish)


Hooking something on the main unit.
 [Caution]
 Suspending weight must be below 49N(5kgf) on each hanger.



Cat. No.	Weight (kg)
DH2698	0.01

Lock-type duplex outlet plugs (with ground) (cream-gray finish)


JIS C 8366 ⚡⚡
 Twin ground 2P 15A 125V locking.
 Use for extract single-phase 100V socket power.

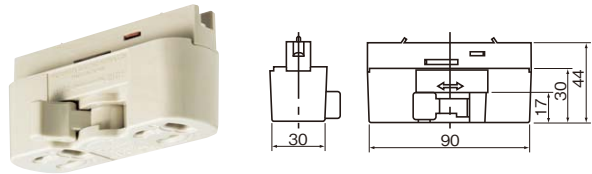

Cat. No.	Rating	Weight (kg)
DH2686	For twin ground 2P15A125V locking	0.1

Lighting fixture plug

JIS C 8366 ⚡⚡
 2P 6A 125V with ground.
 Mounting a lighting fixture directly to the main unit and supply power from upper or lower 2P conductors. Consists of plug and clamp.
 [Caution]
 Suspending weight must be below 98N(10kgf).

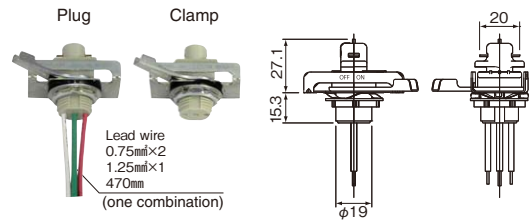

Cat. No.	Rating	Weight (kg)
DH2673K	2P6A125V with ground	0.09

Poster clip (cream-gray finish)

Suspending document or sheet to the main unit.
 [Caution]
 Suspending weight must be below 9.8N(1kgf) on each hanger.



Cat. No.	Weight (kg)
DH2697	0.2