


Panasonic

AG Batten 2G

Panasonic Lighting - Product
Quality Testing



Learn more about
Panasonic lighting



Please contact

Panasonic®

All Rights Reserved © 2024 COPYRIGHT Panasonic Corporation Electric Works Company

LT63 2024.03

Specifications are subject to change without notice.

ISO 9001/14000


2024.03



AG Batten 2G



Long Lifetime
50,000H



Power Factor
0.9



High Efficacy
152-154lm/W



CRI
80

Certification

RoHS / CISPR15 / TISI / CR


*Certification applicable for selected models.
*Spec and certification may change without notice.

Series Lineup


Specification

Rated Voltage	220-240V
Frequency	50/60Hz
Lifetime	50,000 hours
CRI	80
Ambient Temperature Range	5°C-35°C
Power Factor	0.9
Materials	Body: AL (Silver)
IP Rating	IP20
IK	IK08
Classification of Luminaries	Class II
SDCM	5

26W, 46W

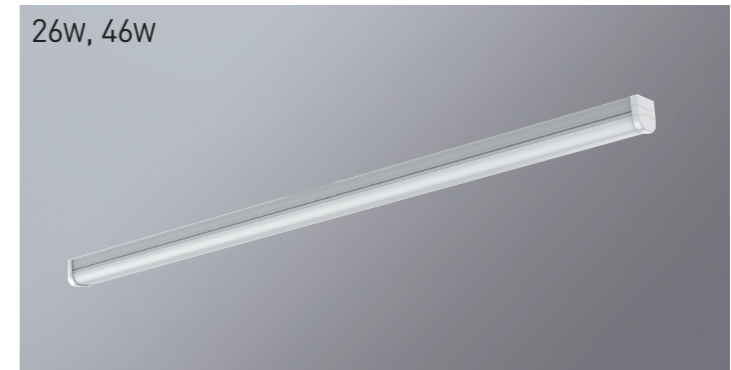

Dimension

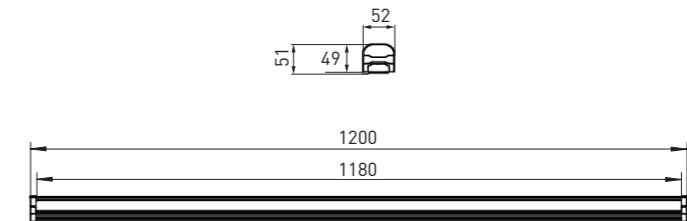

Size : 1200x52x51mm
Weight : 0.68kg

Data

Wattage	26W	46W
Beam Angle	90°	90°
4000K	NFV30102WE 4000lm,154lm/W	NFV30113WE 7000lm,152lm/W
Non Dimming 5000K	NFV30103WE 4000lm,154lm/W	NFV30152WE 7000lm,152lm/W
6500K	NFV30112WE 4000lm,154lm/W	NFV30153WE 7000lm,152lm/W
Photometric Distribution		
cd/klm (±100%) — C0, C180		