


Panasonic

AG Batten

Panasonic Lighting - Product
Quality Testing



Learn more about
Panasonic lighting



Please contact

Panasonic®

All Rights Reserved © 2024 COPYRIGHT Panasonic Corporation Electric Works Company

LT63 2024.03

Specifications are subject to change without notice.

ISO 9001/14000

2024.03




I Series Lineup


Specification

Rated Voltage	220-240V
Frequency	50/60Hz
Lifetime	50,000 hours
CRI	80
Ambient Temperature Range	5°C-35°C
Power Factor	0.95
Materials	Body: Aluminium Panel: PC
IP Rating	IP20
Classification of Luminaries	Class II
SDCM	5

28W, 49W

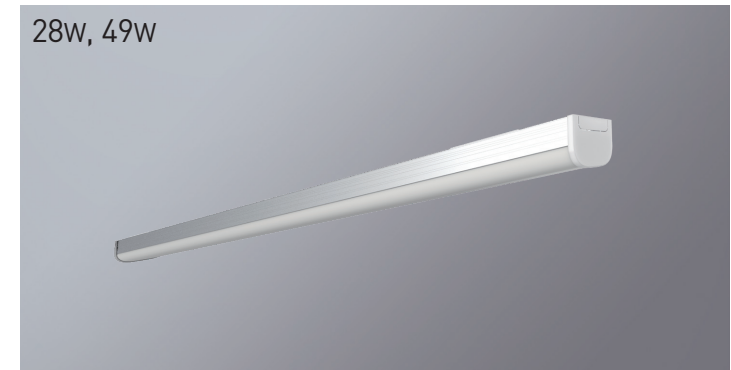

Dimension

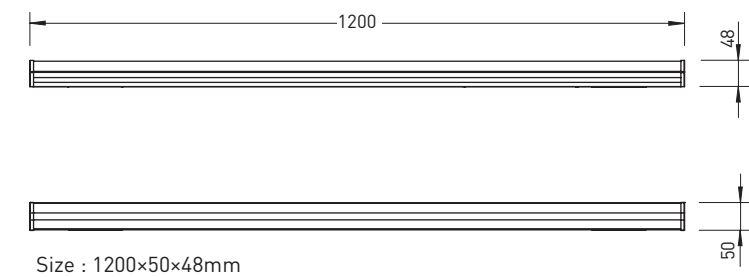

AG Batten



Long Lifetime
50,000H




CRI
80



High Efficacy
140-142lm/W



Durability
Body: Aluminium



Power Factor
0.95

Certification

RoHS / TISI

*Certification applicable for selected models.
*Spec and certification may change without notice.

I Data

Wattage	28W	49W
4000K ●	NFV30002WE 4000lm, 142lm/W	NFV30003WE 7000lm, 142lm/W
Non Dimming ○	5000K NFV30012WE 4000lm, 142lm/W	NFV30013WE 7000lm, 142lm/W
●	6500K NFV30052WE 4000lm, 142lm/W	NFV30053WE 7000lm, 142lm/W
Photometric Distribution		

cd/klm (I=100%)
— C0, C180
— C90, C270