



Panasonic

AG Downlight 2G

Panasonic Lighting - Product
Quality Testing



Learn more about
Panasonic lighting



Please contact

Panasonic®

All Rights Reserved © 2024 COPYRIGHT Panasonic Corporation Electric Works Company

LT63 2024.03

Specifications are subject to change without notice.

ISO 9001/14000

2024.03




I Series Lineup

Specification


Rated Voltage	220-240V
Frequency	50/60Hz
Lifetime	50,000 hours
CRI	80
Ambient Temperature Range	5°C~35°C
Power Factor	0.95
Materials	Body: ADC (Black) Diffuser: PC (Frost) Trim: ADC (White)
IP Rating	IP20
Classification of Luminaries	Class II
SDCM	5




Dimension

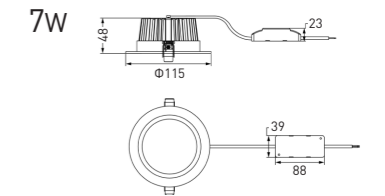


Size : $\Phi 115 \times 48$ mm
Cut out Size : 100mm
Weight : 0.31kg

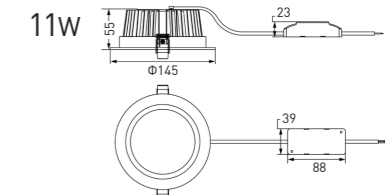

Size : $\Phi 145 \times 55$ mm
Cut out Size : 130mm
Weight : 0.5kg

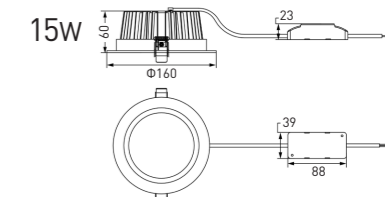

Size : $\Phi 160 \times 60$ mm
Cut out Size : 150mm
Weight : 0.49kg

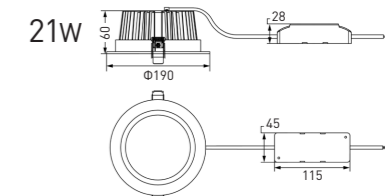

Size : $\Phi 190 \times 60$ mm
Cut out Size : 170mm
Weight : 0.68kg

AG Downlight 2G



Long Lifetime
50,000H




CRI
80



High Efficacy
84-90lm/W



Durability
Body: ADC(Black)



Power Factor
0.95

Certification

RoHS / TISI

*Certification applicable for selected models.
*Spec and certification may change without notice.

I Data

Wattage	7W	11W	15W	21W	
Non Dimming	3000K ●	NNV70301WE2A 585lm,84lm/W	NNV70302WE2A 920lm,84lm/W	NNV70303WE2A 1255lm,84lm/W	NNV70304WE2A 1755lm,84lm/W
	4000K ○	NNV70311WE2A 630lm,90lm/W	NNV70312WE2A 990lm,90lm/W	NNV70313WE2A 1350lm,90lm/W	NNV70314WE2A 1890lm,90lm/W
	6500K ●	NNV70351WE2A 630lm,90lm/W	NNV70352WE2A 990lm,90lm/W	NNV70353WE2A 1350lm,90lm/W	NNV70354WE2A 1890lm,90lm/W
Photometric Distribution					
cd/klm (±100%)					