



# Panasonic

# AG Linear High Bay 2G

Panasonic Lighting - Product Quality Testing



Learn more about Panasonic lighting



Please contact .....

## Panasonic®

All Rights Reserved © 2024 COPYRIGHT Panasonic Corporation Electric Works Company

Specifications are subject to change without notice.

ISO 9001/14000

LT63 2024.03

2024.03




## I Series Lineup

### Specification

Rated Voltage	220-240V
Frequency	50/60Hz
Lifetime	50,000 hours
CRI	80
Ambient Temperature Range	-20°C~45°C
Power Factor	0.98
Materials	Body: Galvanized Steel (White) Diffuser: PC (White)
IP Rating	IP40
Classification of Luminaries	Class I
THDi	<10%



### Dimension

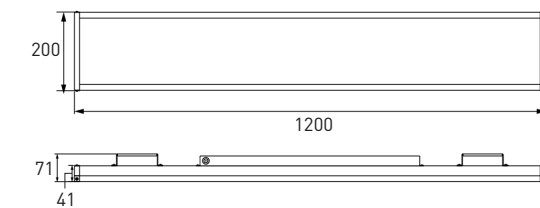

Size : 1200×200×71mm  
Weight : 2.4kg

# AG Linear High Bay 2G



**Long Lifetime**  
50,000H




**CRI**  
80



**High Efficacy**  
130lm/W



**IP Rating**  
IP40



**Power Factor**  
0.98




**Durability**  
Body: Galvanized Steel(White)

Certification

RoHS / TISI

\*Certification applicable for selected models.  
\*Spec and certification may change without notice.

## I Data

Wattage	108W
Dimmable	No
5000K ○	NFV10102WE 14000lm, 130lm/W
Photometric Distribution	
cd/klm (I=100%)	— C0, C180 — C90, C270