


Panasonic

Panasonic Lighting - Product Quality Testing



Learn more about Panasonic lighting



Please contact

Panasonic®

All Rights Reserved © 2024 COPYRIGHT Panasonic Corporation Electric Works Company


LT63 2024.03

Specifications are subject to change without notice.

ISO 9001/14000

Ex 2G Big Panel Light Dimmable (DALI)

2024.03

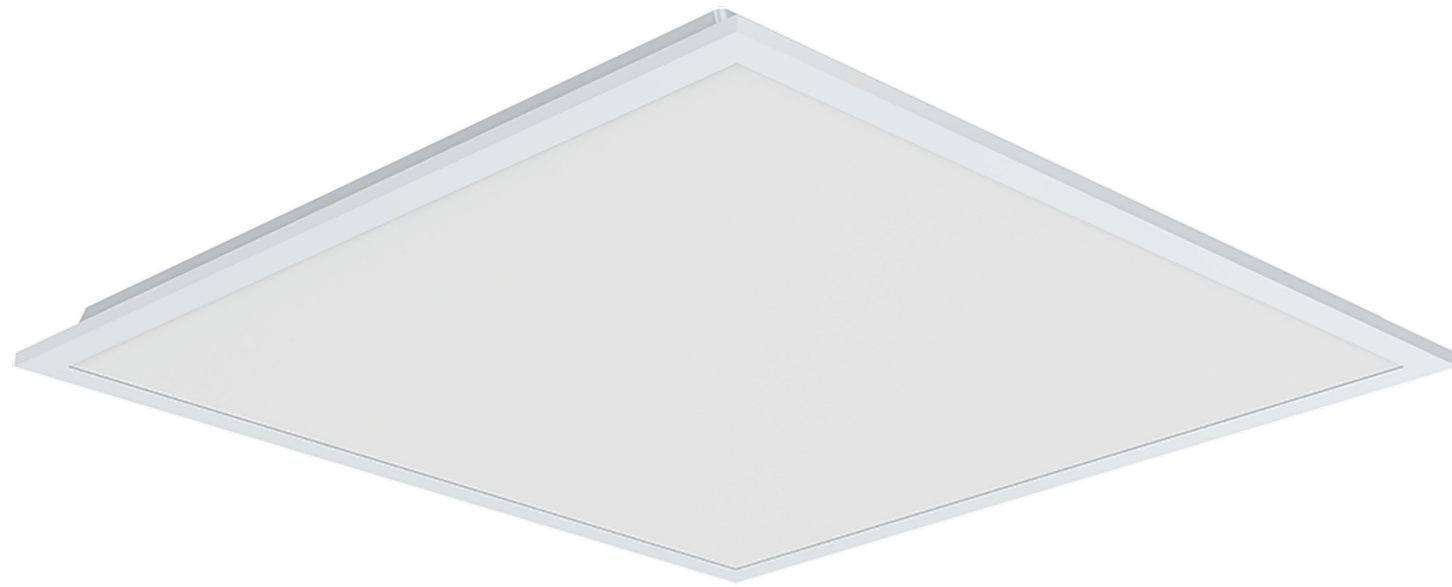

Ex 2G Big Panel

Dimmable Type (DALI)



Long Lifetime
50,000H




CRI
80



High Efficacy
108-122lm/W



Dimming
DALI



Power Factor
0.9

Certification

RoHS / CISPR15 / TISI / CR



*Certification applicable for selected models.
*Spec and certification may change without notice.

I Series Lineup



Specification

| | |
|------------------------------|---|
| Rated Voltage | 220-240V |
| Frequency | 50/60Hz |
| Lifetime | 50,000 hours |
| CRI | 80 |
| Ambient Temperature Range | 5°C-35°C |
| Power Factor | 0.9 |
| Materials | Body: SPCC Frame: Aluminium Panel: PS |
| IP Rating | IP20 |
| Classification of Luminaries | Class II |
| THDi | <10% |
| SDCM | 5 |

Dimension

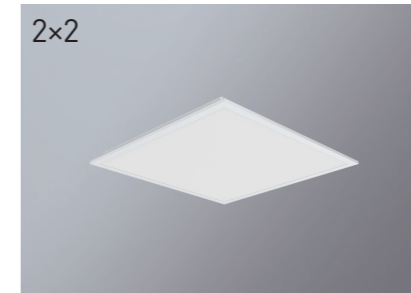

Size : 595×595×35mm
Weight : 2kg

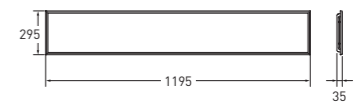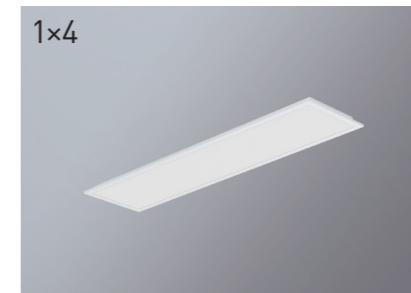

Size : 1195×295×35mm
Weight : 2kg

I Data

| Shape | 2x2 | | 1x4 | |
|--------------------------|------------|----------------------------------|----------------------------------|--|
| | 36W | 36W | 36W | 36W |
| Wattage | 36W | 36W | 36W | 36W |
| Type | Basic | High Efficacy | Basic | High Efficacy |
| Dimming (DALI) | 3000K ● | NNFC70600DZ88 3900lm, 108lm/W | NNFC70601DZ88 4400lm, 122lm/W | NNFC70620DZ88 3900lm, 108lm/W NNFC70621DZ88 4400lm, 122lm/W |
| | 4000K ○ | NNFC70650DZ88 3900lm, 108lm/W | NNFC70651DZ88 4400lm, 122lm/W | NNFC70670DZ88 3900lm, 108lm/W NNFC70671DZ88 4400lm, 122lm/W |
| | 6500K ● | NNFC70660DZ88 3900lm, 108lm/W | NNFC70661DZ88 4400lm, 122lm/W | NNFC70680DZ88 3900lm, 108lm/W NNFC70681DZ88 4400lm, 122lm/W |
| Photometric Distribution | | | | |

cd/klm (l=100%)
— C0, C180
— C90, C270