



Panasonic

Panasonic Lighting - Product Quality Testing



Learn more about Panasonic lighting



Please contact

Panasonic®

All Rights Reserved © 2024 COPYRIGHT Panasonic Corporation Electric Works Company


LT63 2024.03

Specifications are subject to change without notice.

ISO 9001/14000

Ex 2G Big Panel Light Low UGR

2024.03

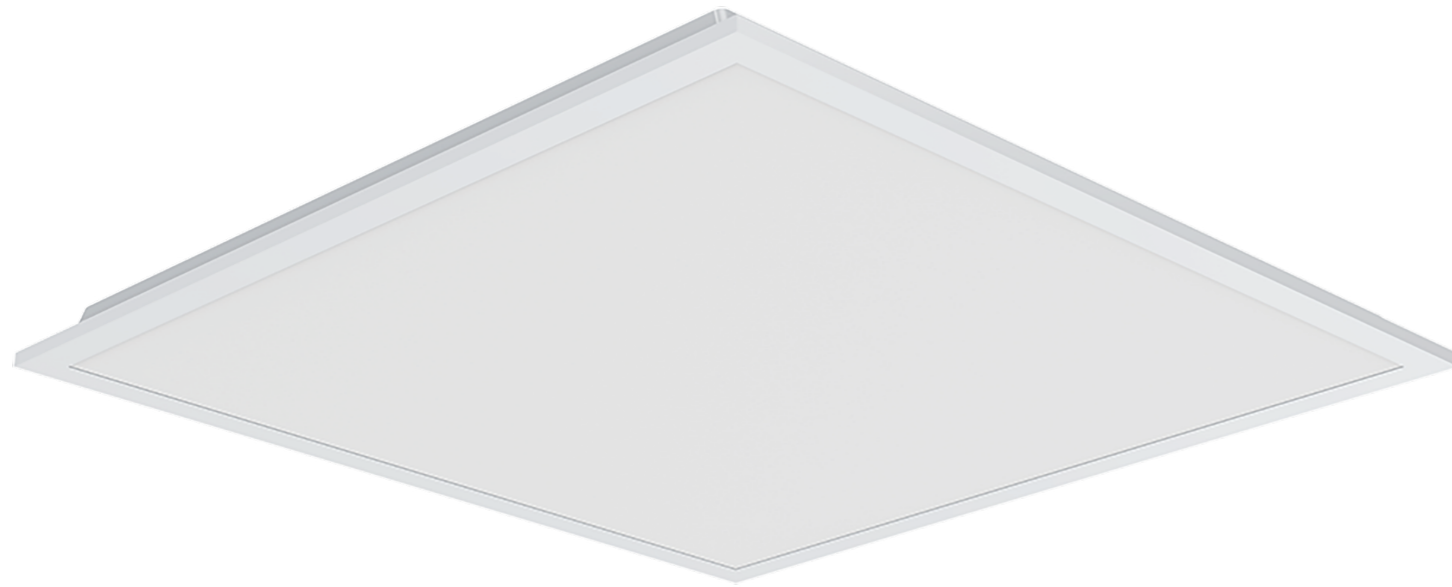

Ex 2G Big Panel

Low UGR Type



Long Lifetime
50,000H




CRI
80



High Efficacy
106lm/W



Low Glare
UGR19



Power Factor
0.9

Certification

RoHS / CISPR15 / TISI / CR



*Certification applicable for selected models.
*Spec and certification may change without notice.

I Series Lineup



Specification

Rated Voltage	220-240V
Frequency	50/60Hz
Lifetime	50,000 hours
CRI	80
Ambient Temperature Range	5°C-35°C
Power Factor	0.9
Materials	Body: SPCC
	Frame: Aluminium
	Panel: PS
IP Rating	IP20
UGR	19
Classification of Luminaries	Class II

Dimension

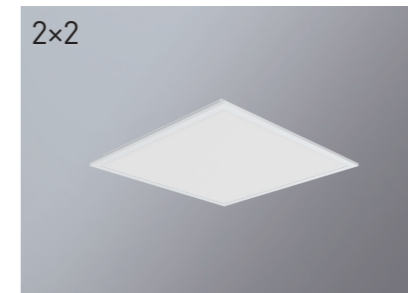

Size : 595×595×35mm
Weight : 2kg

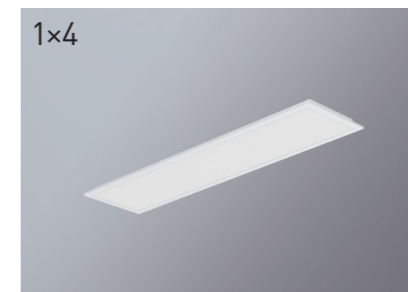

Size : 1195×295×35mm
Weight : 2kg

I Data

Shape	2x2	1x4
Wattage	36W	36W
Non Dimming	4000K ●	NFV60040WE1A 3800lm, 106lm/W
	6500K ●	NFV60060WE1A 3800lm, 106lm/W
Photometric Distribution		
	cd/klm (l=100%) — C0, C180 — C90, C270	