


Panasonic

Panasonic Lighting - Product Quality Testing



Learn more about Panasonic lighting



Please contact

Panasonic®

All Rights Reserved © 2024 COPYRIGHT Panasonic Corporation Electric Works Company


LT63 2024.03

Specifications are subject to change without notice.

ISO 9001/14000

Ex 2G Big Panel Light Standard


2024.03

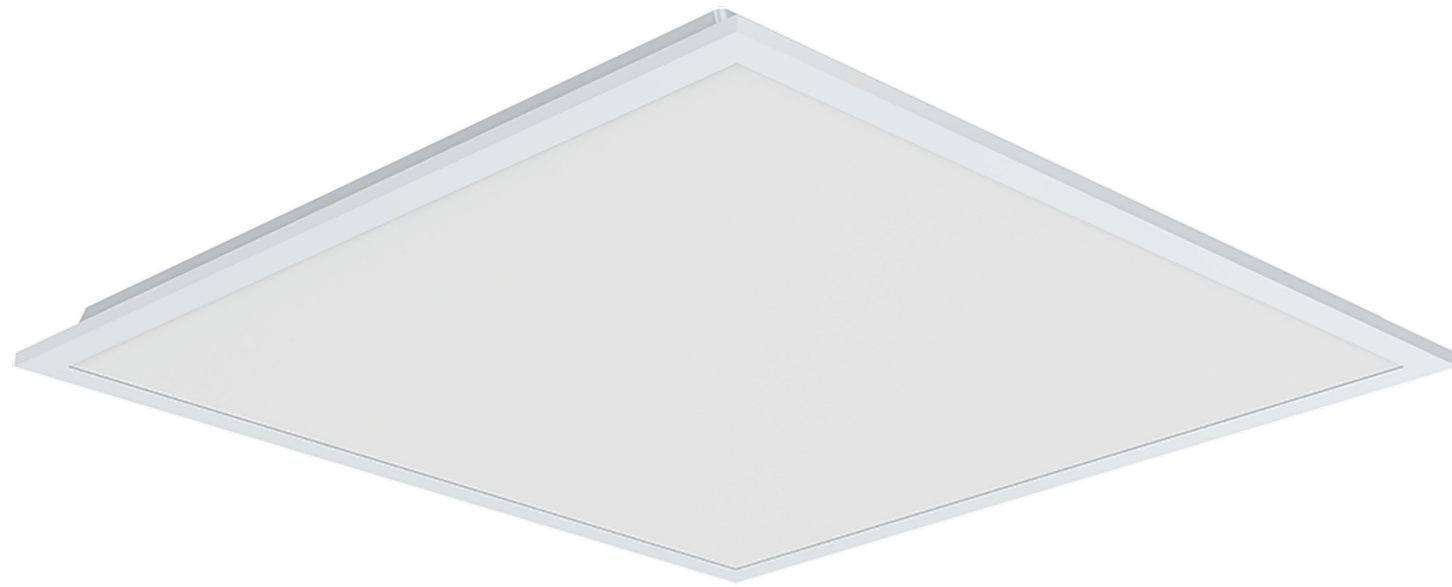

Ex 2G Big Panel



Long Lifetime
50,000H



Power Factor
0.9



High Efficacy
108-138lm/W



CRI
80

Certification

RoHS / CISPR15 / TISI / CR

*Certification applicable for selected models.
*Spec and certification may change without notice.



I Series Lineup

Specification



Rated Voltage	220-240V
Frequency	50/60Hz
Lifetime	50,000 hours
CRI	80
Ambient Temperature Range	5°C-35°C
Power Factor	0.9
Materials	Body: SPCC Frame: Aluminium Panel: PS
IP Rating	IP20
Classification of Luminaries	Class II
THDi	<10%
SDCM	5*

*Selected models


Dimension

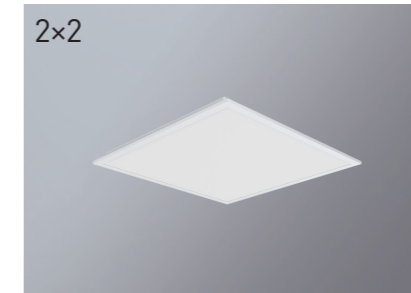

Size : 595x595x35mm
Weight : 2kg

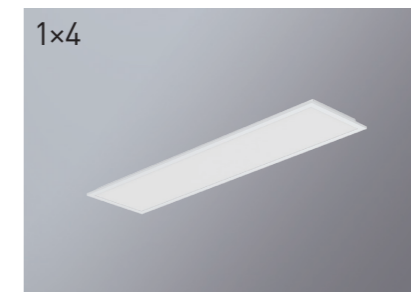

Size : 1195x295x35mm
Weight : 2kg

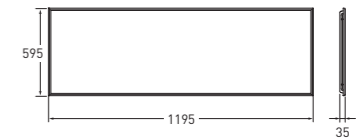

Size : 1195x595x35mm
Weight : 3kg

I Data

Shape	2x2		1x4		2x4		
	36W	36W	36W	36W	36W	45W	
Type	Basic	High Efficacy	Basic	High Efficacy	Basic	High Efficacy	
Non Dimming	3000K ●	NNFC70600LE88 3900lm,108lm/W	NNFC70601LE88 4400lm,122lm/W	NNFC70620LE88 3900lm,108lm/W	NNFC70621LE88 4400lm,122lm/W	NNFC7064088 4500lm,125lm/W	NNFC7064188 6250lm,138lm/W
	4000K ○	NNFC70650LE88 3900lm,108lm/W	NNFC70651LE88 4400lm,122lm/W	NNFC70670LE88 3900lm,108lm/W	NNFC70671LE88 4400lm,122lm/W	NNFC7069088 4500lm,125lm/W	NNFC7069188 6250lm,138lm/W
	6500K ●	NNFC70660LE88 3900lm,108lm/W	NNFC70661LE88 4400lm,122lm/W	NNFC70680LE88 3900lm,108lm/W	NNFC70681LE88 4400lm,122lm/W	NNFC7069588 4500lm,125lm/W	NNFC7069688 6250lm,138lm/W
Photometric Distribution							

cd/klm (l=100%)
— C0, C180
— C90, C270