


Panasonic

SP 2G Big Panel Light

Panasonic Lighting - Product Quality Testing



Learn more about Panasonic lighting



Please contact

Panasonic®


All Rights Reserved © 2024 COPYRIGHT Panasonic Corporation Electric Works Company

LT63 2024.03

Specifications are subject to change without notice.

ISO 9001/14000


2024.03

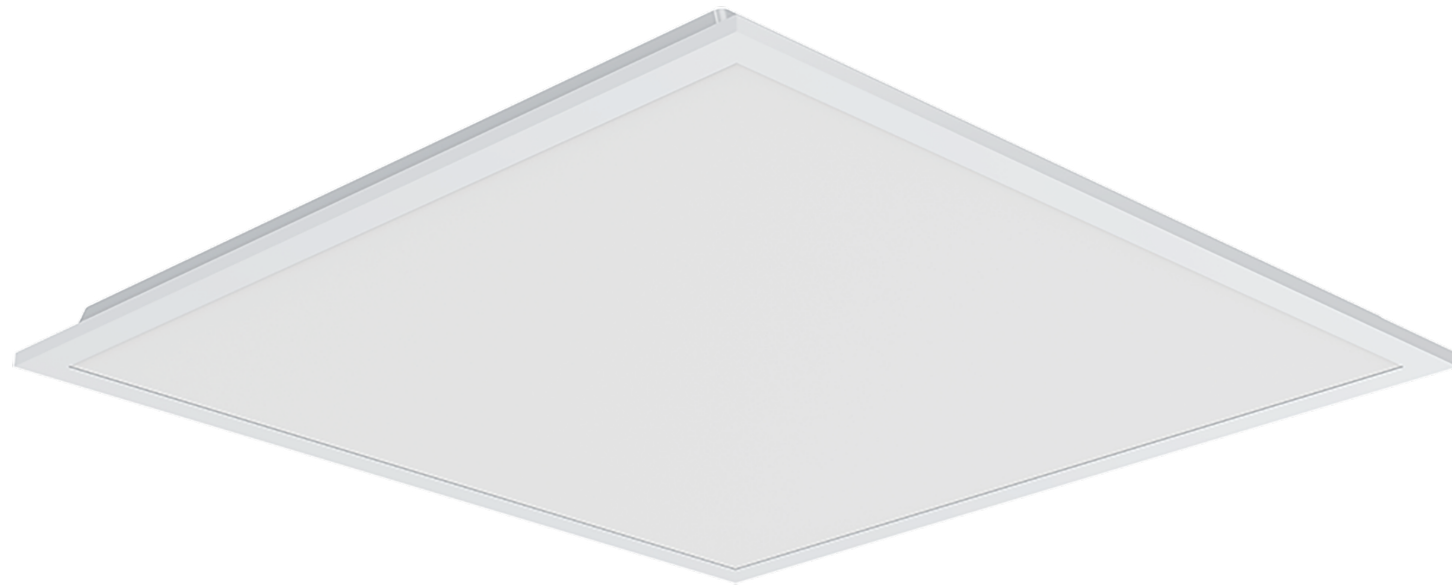

SP 2G Big Panel



Long Lifetime
30,000H



Power Factor
0.9



High Efficacy
108-122lm/W



CRI
80

Certification

RoHS / CISPR15 / TISI / SIRIM

*Certification applicable for selected models.
*Spec and certification may change without notice.



Series Lineup

Specification



Rated Voltage	220-240V
Frequency	50/60Hz
Lifetime	30,000 hours
CRI	80
Ambient Temperature Range	5°C~35°C
Power Factor	0.9
Materials	Body: SPCC
	Frame: Aluminium (White)
	Panel: PS (Frost)
IP Rating	IP20
Classification of Luminaries	Class II*
THDi	<10%*
SDCM	5*

*Selected models

Dimension

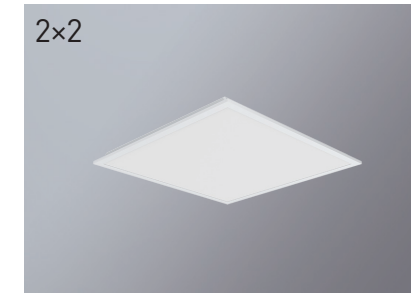

Size : 595x595x35mm
Weight : 2kg


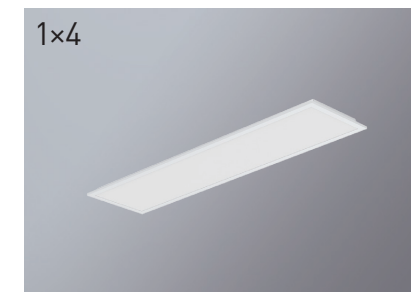


Size : 1195x295x35mm
Weight : 2kg

Data

Shape	2x2		1x4		
	36W	36W	36W	36W	
Wattage	36W	36W	36W	36W	
Type	Basic	High Efficacy	Basic	High Efficacy	
Non Dimming	3000K ●	NNFC7050088 3900lm, 108lm/W	NNFC7050188 4400lm, 122lm/W	NNFC7052088 3900lm, 108lm/W	NNFC7052188 4400lm, 122lm/W
	4000K ●	NNFC7055088 3900lm, 108lm/W	NNFC7055188 4400lm, 122lm/W	NNFC7057088 3900lm, 108lm/W	NNFC7057188 4400lm, 122lm/W
	6500K ●	NNFC7056088 3900lm, 108lm/W	NNFC7056188 4400lm, 122lm/W	NNFC7058088 3900lm, 108lm/W	NNFC7058188 4400lm, 122lm/W

Photometric Distribution



cd/klm (η=100%)
— C0, C180
— C90, C270