





Certificates & Standards

Dimension and Materials

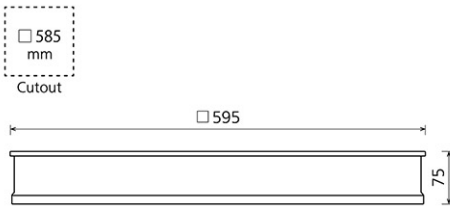

Photometric Chart

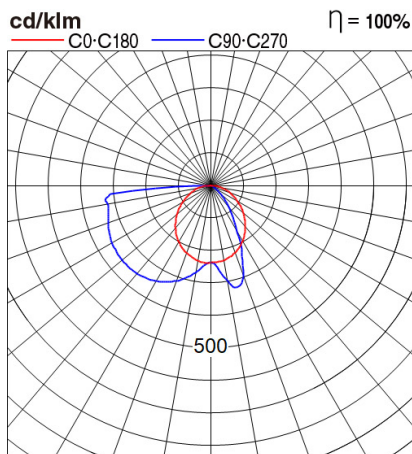

Ref. No.	
Type of Luminaire	Baselight
	LGP
	KUU Series_FLOAT Square
Set Model No.	KRGX0111648DW
Type of Light Source	LED
Power Input	16W
System Lumen Output	1120 lm
System Efficacy	70 lm/W
Power Voltage	240V
Power Factor	>0.90
Lifetime	50000H(L70)
CCT	4000K
CRI	80
SDCM	<3
Input Frequency	50Hz
Dimming	non-Dimmable
Dimming Range	
UGR	
Glare Cut Angle	
Beam Angle	
Rotation Angle	
Tilt Angle	
IP code	20
IK code	
Ambient Temperature Range	-10 - 45°C
Surge Protection	4KV
Classification of Luminaries	
THDi	<20
Effective Projected Area	
Driver	Integrated
Cut Out Size	
Dimensions	W595mm*L595mm*H75mm
Weight	5.1 kg
Body	CRCA
Reflector	
Diffuser	PMMA
Trim	
Casing	
Country of Origin	India
Brand	Panasonic
Remarks	

Spec and certification may change without notice.

Others