


Panasonic




Certificates & Standards

RoHS

Dimension and Materials

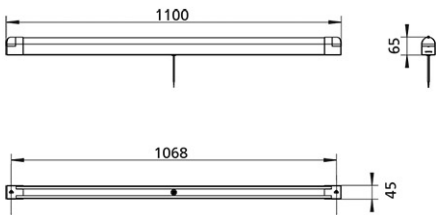

Photometric Chart

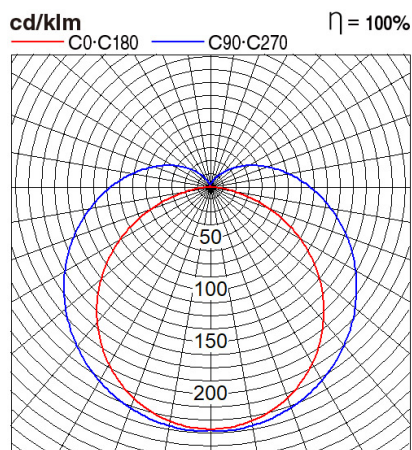

Ref. No.	
Type of Luminaire	Baselight Cleanroom Baselight Cleanroom
Set Model No.	NFV30021WE1A
Type of Light Source	LED
Power Input	30W
System Lumen Output	4000 lm
System Efficacy	133 lm/W
Power Voltage	220-240V
Power Factor	0.95
Lifetime	50000H(L70)
CCT	4000K
CRI	
SDCM	<5
Input Frequency	50/60Hz
Dimming	non-Dimmable
Dimming Range	
UGR	
Glare Cut Angle	
Beam Angle	120deg.
Rotation Angle	
Tilt Angle	
IP code	40
IK code	
Ambient Temperature Range	5 - 35°C
Surge Protection	
Classification of Luminaires	Class I
THDi	
Effective Projected Area	
Driver	Integrated
Cut Out Size	
Dimensions	65mm*1100mm*45mm
Weight	0.83 kg
Body	PC
Reflector	
Diffuser	PC
Trim	
Casing	
Country of Origin	China
Brand	Panasonic
Remarks	

Others

Spec and certification may change without notice.