





## Certificates & Standards

RoHs / CISPR15 / TISI / CR

## Dimension and Materials

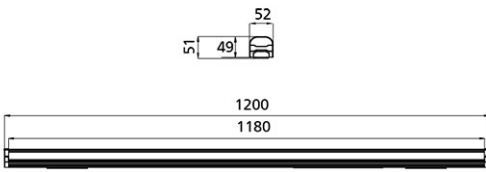

## Photometric Chart

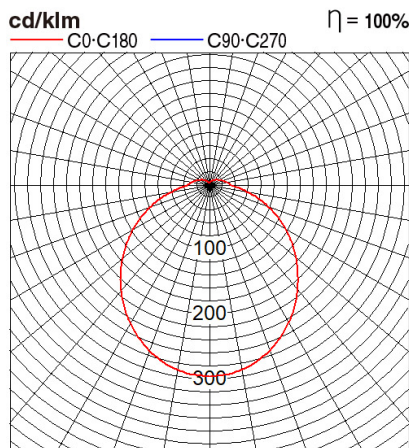

Ref. No.	
Type of Luminaire	Batten
	Standard Batten (Pro)
	AG Batten
Set Model No.	<b>NFV30102WE</b>
Type of Light Source	LED
Power Input	26W
System Lumen Output	4000 lm
System Efficacy	154 lm/W
Power Voltage	220-240V
Power Factor	0.9
Lifetime	50000H(L70)
CCT	4000K
CRI	80
SDCM	<5
Input Frequency	50/60Hz
Dimming	non-Dimmable
Dimming Range	
UGR	
Glare Cut Angle	
Beam Angle	120deg.
Rotation Angle	
Tilt Angle	90deg.
IP code	20
IK code	IK8
Ambient Temperature Range	5 - 35°C
Surge Protection	
Classification of Luminaires	Class II
THDi	
Effective Projected Area	
Driver	Integrated
Cut Out Size	
Dimensions	52mm*1200mm*51mm
Weight	0.68 kg
Body	AL(Silver)
Reflector	
Diffuser	
Trim	
Casing	
Country of Origin	China
Brand	Panasonic
Remarks	

## Others

Spec and certification may change without notice.