





Certificates & Standards

RoHs / CISPR15 / TISI / CR

Dimension and Materials

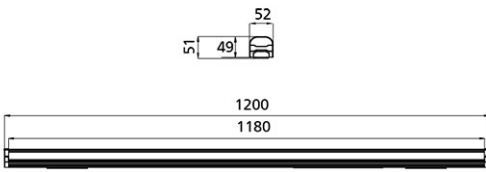

Photometric Chart

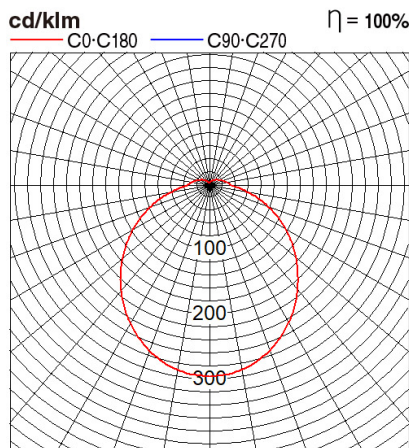

Ref. No.	
Type of Luminaire	Batten
	Standard Batten (Pro)
	AG Batten
Set Model No.	NFV30112WE
Type of Light Source	LED
Power Input	26W
System Lumen Output	4000 lm
System Efficacy	154 lm/W
Power Voltage	220-240V
Power Factor	0.9
Lifetime	50000H(L70)
CCT	6500K
CRI	80
SDCM	<5
Input Frequency	50/60Hz
Dimming	non-Dimmable
Dimming Range	
UGR	
Glare Cut Angle	
Beam Angle	120deg.
Rotation Angle	
Tilt Angle	120deg.
IP code	20
IK code	IK8
Ambient Temperature Range	5 - 35°C
Surge Protection	
Classification of Luminaires	Class II
THDi	
Effective Projected Area	
Driver	Integrated
Cut Out Size	
Dimensions	52mm*1200mm*51mm
Weight	0.68 kg
Body	AL(Silver)
Reflector	
Diffuser	
Trim	
Casing	
Country of Origin	China
Brand	Panasonic
Remarks	

Others

Spec and certification may change without notice.