





## Certificates & Standards

RoHs / TISI

## Dimension and Materials

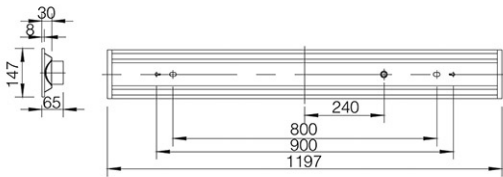

## Photometric Chart

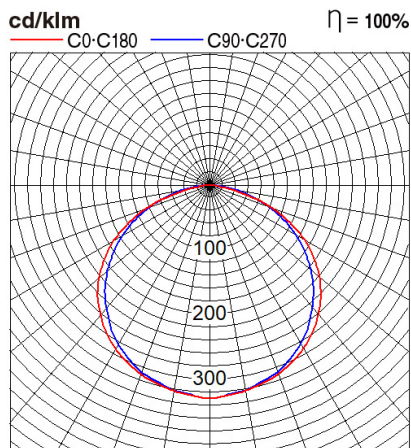

Ref. No.	
Type of Luminaire	Baselight
	Pro iD Series
	High Efficacy
Set Model No.	<b>NFV40248WE1A</b>
Type of Light Source	LED
Power Input	39W
System Lumen Output	7000 lm
System Efficacy	179 lm/W
Power Voltage	220-240V
Power Factor	0.95
Lifetime	50000H(L70)
CCT	4000K
CRI	80
SDCM	<5
Input Frequency	50/60Hz
Dimming	non-Dimmable
Dimming Range	
UGR	
Glare Cut Angle	
Beam Angle	
Rotation Angle	
Tilt Angle	
IP code	20
IK code	
Ambient Temperature Range	5 - 35°C
Surge Protection	
Classification of Luminaires	Class I
THDi	<10%
Effective Projected Area	
Driver	Integrated
Cut Out Size	
Dimensions	147mm*1197mm*65mm
Weight	2.3 kg
Body	Steel (White)
Reflector	
Diffuser	PC(Frost)
Trim	
Casing	
Country of Origin	China
Brand	Panasonic
Remarks	Cut Out Size : 125mm*1185mm

Spec and certification may change without notice.

## Others