





Certificates & Standards

RoHs / TISI

Dimension and Materials



Photometric Chart

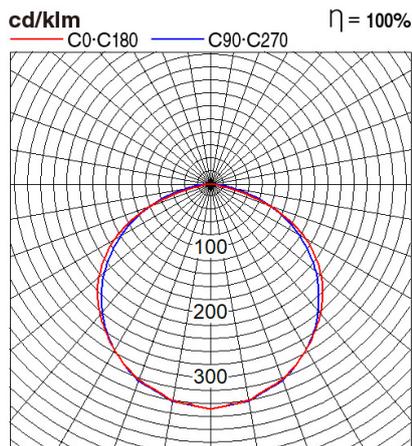

Ref. No.	
Type of Luminaire	Baselight
	Pro iD Series
	Standard
Set Model No.	NFV40262WE1A
Type of Light Source	LED
Power Input	30.5W
System Lumen Output	4000 lm
System Efficacy	131 lm/W
Power Voltage	220-240V
Power Factor	0.95
Lifetime	50000H(L70)
CCT	5000K
CRI	80
SDCM	<5
Input Frequency	50/60Hz
Dimming	non-Dimmable
Dimming Range	
UGR	
Glare Cut Angle	
Beam Angle	
Rotation Angle	
Tilt Angle	
IP code	20
IK code	
Ambient Temperature Range	5 - 35°C
Surge Protection	2kV
Classification of Luminaires	Class I
THDi	<10%
Effective Projected Area	
Driver	Integrated
Cut Out Size	
Dimensions	W597mm*L597mm*H53mm
Weight	3.8 kg
Body	Steel(White)
Reflector	
Diffuser	PC(Frost)
Trim	
Casing	
Country of Origin	China
Brand	Panasonic
Remarks	Cut Out Size : 575mm*575mm

Spec and certification may change without notice.

Others