




Certificates & Standards

RoHs

Dimension and Materials

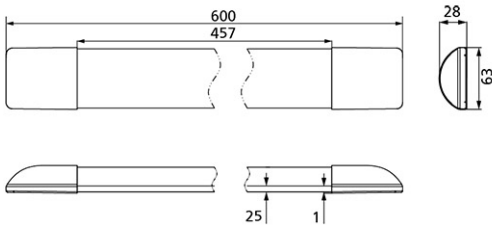

Photometric Chart

Ref. No.	
Type of Luminaire	Batten Standard Batten (Pro) SP Batten 2G
Set Model No.	NFV50101WE1A
Type of Light Source	LED
Power Input	20W
System Lumen Output	2000 lm
System Efficacy	100 lm/W
Power Voltage	220-240V
Power Factor	0.9
Lifetime	25000H(L70)
CCT	3000K
CRI	80
SDCM	<5
Input Frequency	50/60Hz
Dimming	non-Dimmable
Dimming Range	
UGR	
Glare Cut Angle	
Beam Angle	
Rotation Angle	
Tilt Angle	
IP code	20
IK code	
Ambient Temperature Range	5 - 35°C
Surge Protection	
Classification of Luminaries	Class II
THDi	
Effective Projected Area	
Driver	Integrated
Cut Out Size	
Dimensions	63mm*60mm*28mm
Weight	0.167 kg
Body	PC(White)
Reflector	
Diffuser	
Trim	
Casing	
Country of Origin	China
Brand	Panasonic
Remarks	

Spec and certification may change without notice.

Others