


Panasonic




Certificates & Standards

RoHs / CISPR15 / CR

Dimension and Materials

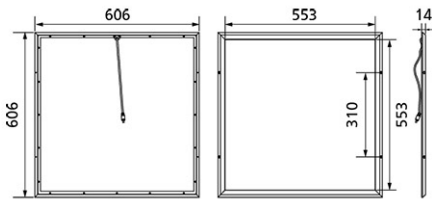

Photometric Chart

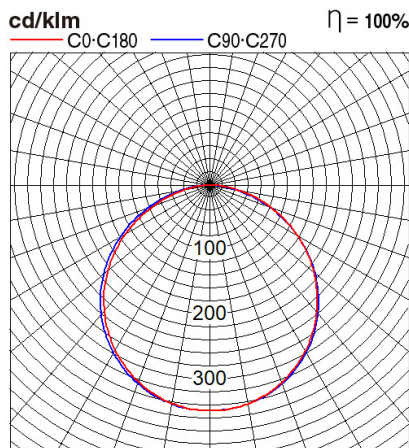

| | |
|------------------------------|---|
| Ref. No. | |
| Type of Luminaire | Baselight Cleanroom Baselight Cleanroom |
| Set Model No. | NFV60021WE1A |
| Type of Light Source | LED |
| Power Input | 40W |
| System Lumen Output | 4000 lm |
| System Efficacy | 100 lm/W |
| Power Voltage | 220-240V |
| Power Factor | 0.95 |
| Lifetime | 50000H(L70) |
| CCT | 4000K |
| CRI | |
| SDCM | <5 |
| Input Frequency | 50/60Hz |
| Dimming | non-Dimmable |
| Dimming Range | |
| UGR | |
| Glare Cut Angle | |
| Beam Angle | 120deg. |
| Rotation Angle | |
| Tilt Angle | |
| IP code | 40 |
| IK code | |
| Ambient Temperature Range | 5 - 35°C |
| Surge Protection | |
| Classification of Luminaires | Class II |
| THDi | |
| Effective Projected Area | |
| Driver | External |
| Cut Out Size | |
| Dimensions | 606mm*606mm*14mm |
| Weight | 2.44 kg |
| Body | Aluminum |
| Reflector | |
| Diffuser | PS |
| Trim | |
| Casing | |
| Country of Origin | China |
| Brand | Panasonic |
| Remarks | |

Others

Spec and certification may change without notice.