


# Panasonic




## Certificates & Standards

RoHS

## Dimension and Materials

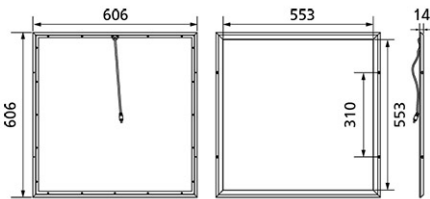

## Photometric Chart

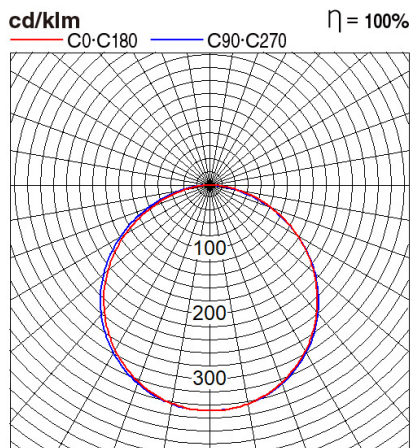

Ref. No.	
Type of Luminaire	Baselight Cleanroom Baselight Cleanroom
Set Model No.	<b>NFV60022WE1A</b>
Type of Light Source	LED
Power Input	40W
System Lumen Output	4000 lm
System Efficacy	100 lm/W
Power Voltage	220-240V
Power Factor	0.95
Lifetime	50000H(L70)
CCT	5000K
CRI	
SDCM	<5
Input Frequency	50/60Hz
Dimming	non-Dimmable
Dimming Range	
UGR	
Glare Cut Angle	
Beam Angle	120deg.
Rotation Angle	
Tilt Angle	
IP code	40
IK code	
Ambient Temperature Range	5 - 35°C
Surge Protection	
Classification of Luminaires	Class II
THDi	
Effective Projected Area	
Driver	External
Cut Out Size	
Dimensions	606mm*606mm*14mm
Weight	2.44 kg
Body	Aluminum
Reflector	
Diffuser	PS
Trim	
Casing	
Country of Origin	China
Brand	Panasonic
Remarks	

Spec and certification may change without notice.

## Others