


Panasonic




Certificates & Standards

RoHS

Dimension and Materials

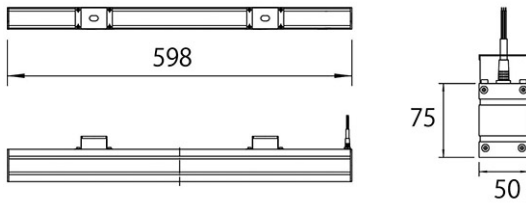

Photometric Chart

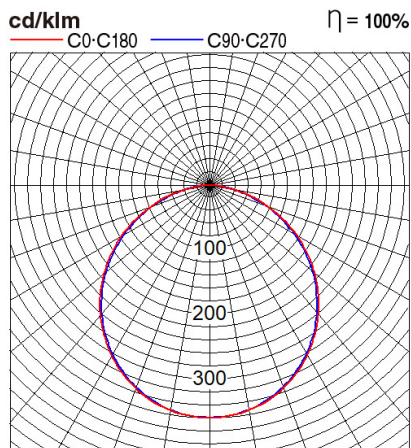

| | |
|------------------------------|--------------------|
| Ref. No. | |
| Type of Luminaire | Baselight |
| | Linear Light |
| | Pro Line Series |
| Set Model No. | NNFC2050488 |
| Type of Light Source | LED |
| Power Input | 21W |
| System Lumen Output | 1890 lm |
| System Efficacy | 90 lm/W |
| Power Voltage | 220-240V |
| Power Factor | 0.9 |
| Lifetime | 40000H(L70) |
| CCT | 5000K |
| CRI | 80 |
| SDCM | <5 |
| Input Frequency | 50/60Hz |
| Dimming | non-Dimmable |
| Dimming Range | |
| UGR | |
| Glare Cut Angle | |
| Beam Angle | |
| Rotation Angle | |
| Tilt Angle | |
| IP code | 41 |
| IK code | |
| Ambient Temperature Range | 5 - 45°C |
| Surge Protection | |
| Classification of Luminaires | Class I |
| THDi | |
| Effective Projected Area | |
| Driver | Integrated |
| Cut Out Size | |
| Dimensions | 50mm*598mm*105mm |
| Weight | 1.3 kg |
| Body | Steel(White) |
| Reflector | |
| Diffuser | PC(Frost) |
| Trim | |
| Casing | |
| Country of Origin | China |
| Brand | Panasonic |
| Remarks | |

Spec and certification may change without notice.

Others