Panasonic


Ref. No.	
Type of Luminaire	Baselight
	Baselight_Surface mounted
	Pro iD Series Reflector
Set Model No.	**NNFC4011088**




Type of Light Source	LED
Power Input	31W
System Lumen Output	4000 lm
System Efficacy	129 lm/W
Power Voltage	220-240V
Power Factor	0.95
Lifetime	40000H(L70)
CCT	5000K
CRI	80
SDCM	<5
Input Frequency	50/60Hz
Dimming	non-Dimmable
Dimming Range	
UGR	
Glare Cut Angle	
Beam Angle	
Rotation Angle	
Tilt Angle	
IP code	20
IK code	
Ambient Temperature Range	5 - 35℃
Surge Protection	2kV
Classification of Luminaries	Class Ⅰ
THDi	<10%
Effective Projected Area	
Driver	Integrated
Cut Out Size	
Dimensions	W150mm*L1150mm*H58mm
Weight	1.9 kg
Body	Steel (White)
Reflector	
Diffuser	PC(Frost)
Trim	
Casing	
Country of Origin	China
Brand	Panasonic
Remarks	

Certificates & Standards
RoHs / TISI

Dimension and Materials

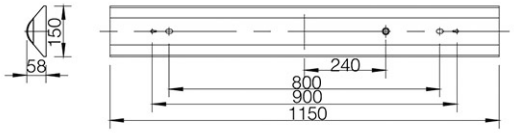

Photometric Chart

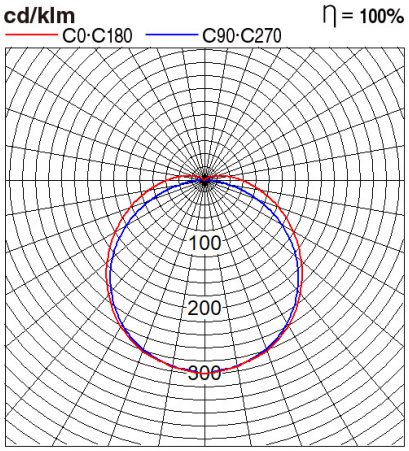

Spec and certification may change without notice.

Others

2026.10.15