





Certificates & Standards

RoHs / TISI / SIRIM

Dimension and Materials



Photometric Chart

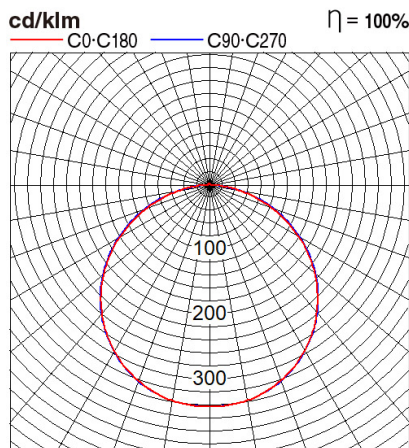

| | |
|------------------------------|--|
| Ref. No. | |
| Type of Luminaire | Baselight Standard Baselight (Pro) SP 2G |
| Set Model No. | NNFC7050188 |
| Type of Light Source | LED |
| Power Input | 36W |
| System Lumen Output | 4400 lm |
| System Efficacy | 122 lm/W |
| Power Voltage | 220-240V |
| Power Factor | 0.9 |
| Lifetime | 30000H(L70) |
| CCT | 3000K |
| CRI | 80 |
| SDCM | |
| Input Frequency | 50/60Hz |
| Dimming | non-Dimmable |
| Dimming Range | |
| UGR | |
| Glare Cut Angle | |
| Beam Angle | |
| Rotation Angle | |
| Tilt Angle | |
| IP code | 20 |
| IK code | |
| Ambient Temperature Range | 5 - 35°C |
| Surge Protection | |
| Classification of Luminaires | Class II |
| THDi | <10% |
| Effective Projected Area | |
| Driver | External |
| Cut Out Size | |
| Dimensions | 595mm*595mm*35mm |
| Weight | 2 kg |
| Body | SPCC(White) |
| Reflector | |
| Diffuser | PS(Frost) |
| Trim | Aluminium(White) |
| Casing | |
| Country of Origin | China |
| Brand | Panasonic |
| Remarks | |

Spec and certification may change without notice.

Others