


# Panasonic




## Certificates & Standards

RoHs / TISI / SIRIM

## Dimension and Materials

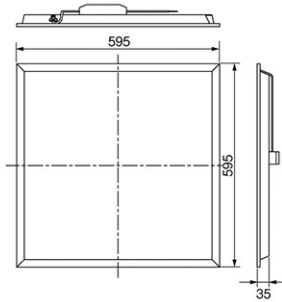

## Photometric Chart

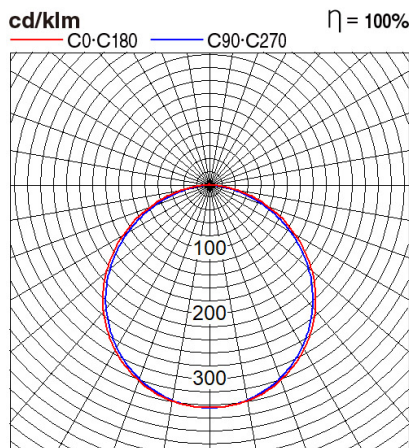

Ref. No.	
Type of Luminaire	Baselight Standard Baselight (Pro) SP 2G
Set Model No.	<b>NNFC7055088</b>
Type of Light Source	LED
Power Input	36W
System Lumen Output	3900 lm
System Efficacy	108 lm/W
Power Voltage	220-240V
Power Factor	0.9
Lifetime	30000H(L70)
CCT	4000K
CRI	80
SDCM	<5
Input Frequency	50/60Hz
Dimming	non-Dimmable
Dimming Range	
UGR	
Glare Cut Angle	
Beam Angle	
Rotation Angle	
Tilt Angle	
IP code	20
IK code	
Ambient Temperature Range	5 - 35°C
Surge Protection	
Classification of Luminaires	Class II
THDi	<10%
Effective Projected Area	
Driver	External
Cut Out Size	
Dimensions	595mm*595mm*35mm
Weight	2 kg
Body	SPCC(White)
Reflector	
Diffuser	PS(Frost)
Trim	Aluminium(White)
Casing	
Country of Origin	China
Brand	Panasonic
Remarks	

Spec and certification may change without notice.

## Others