Panasonic




Certificates & Standards

Dimension and Materials



Photometric Chart

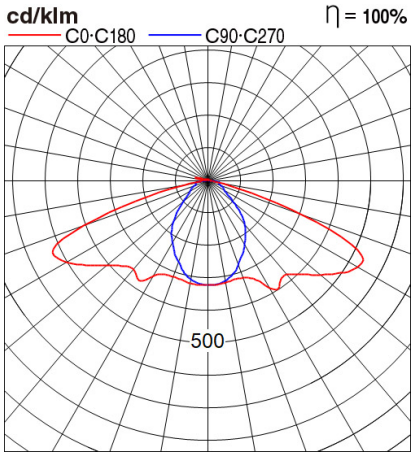

Ref. No.	
Type of Luminaire	Street Light
	Pole Light
	Pole Light With ARM
Set Model No.	**NNP104W43**

Type of Light Source	LED
Power Input	45W
System Lumen Output	10800 lm
System Efficacy	240 lm/W
Power Voltage	220-240V
Power Factor	0.9
Lifetime	50000H(L70)
CCT	3000K
CRI	80
SDCM	
Input Frequency	50/60Hz
Dimming	non-Dimmable
Dimming Range	
UGR	
Glare Cut Angle	
Beam Angle	35deg.
Rotation Angle	
Tilt Angle	
IP code	65
IK code	
Ambient Temperature Range	35℃
Surge Protection	
Classification of Luminaries	
THDi	
Effective Projected Area	
Driver	Integrated
Cut Out Size	
Dimensions	W120mm*L1000mm*H4500mm
Weight	
Body	Painted Galvanized Steel
Reflector	
Diffuser	Polycarbonate
Trim	
Casing	
Country of Origin	Indonesia
Brand	Panasonic
Remarks	Beam Angle 140° X 35°

Spec and certification may change without notice.

Others

2026.10.15