
Panasonic




**Certificates & Standards**

Dimension and Materials

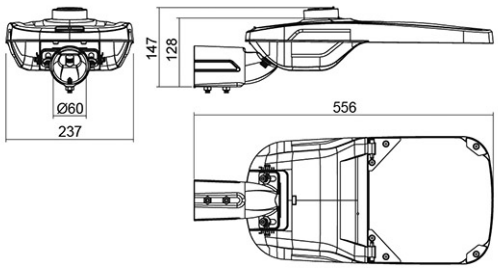


Photometric Chart

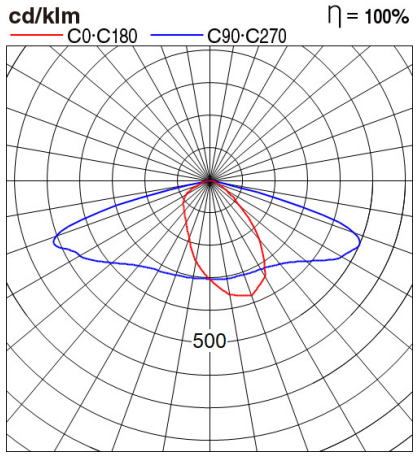


| | |
|---|---|
| Ref. No. | |
| Type of Luminaire | Street Light |
| | Smart |
| | Power I Ready |
| Set Model No. | **NNP13207P** |

| | |
|---|---|
| Type of Light Source | LED |
| Power Input | 120W |
| System Lumen Output | 16800 lm |
| System Efficacy | 140 lm/W |
| Power Voltage | 100-240V |
| Power Factor | |
| Lifetime | |
| CCT | 5000K |
| CRI | 70 |
| SDCM | |
| Input Frequency | 50/60Hz |
| Dimming | non-Dimmable |
| Dimming Range | |
| UGR | |
| Glare Cut Angle | |
| Beam Angle | 120deg. |
| Rotation Angle | |
| Tilt Angle | |
| IP code | 66 |
| IK code | |
| Ambient Temperature Range | 30℃ |
| Surge Protection | |
| Classification of Luminaries | |
| THDi | |
| Effective Projected Area | |
| Driver | Integrated |
| Cut Out Size | |
| Dimensions | W237mm*L556mm*H147mm |
| Weight | |
| Body | Painted Aluminum Die Cast |
| Reflector | |
| Diffuser | |
| Trim | |
| Casing | |
| Country of Origin | Indonesia |
| Brand | Panasonic |
| Remarks | |

Spec and certification may change without notice.

Others