


Panasonic




Certificates & Standards

Dimension and Materials

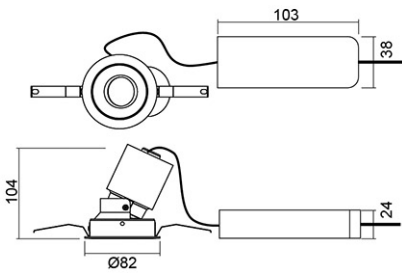

Photometric Chart

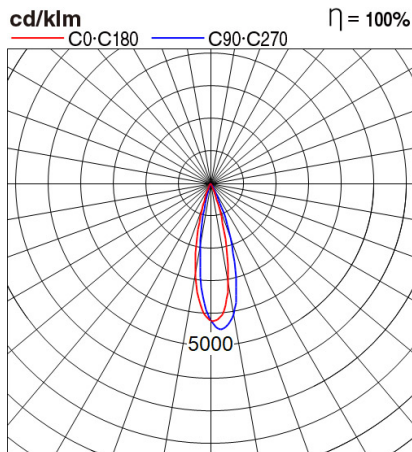

| | |
|------------------------------|--|
| Ref. No. | |
| Type of Luminaire | Downlight |
| | Glareless + Adjustable DL |
| | Glareless Family (Adjustable Glaress DL) |
| Set Model No. | NNP23293DL |
| Type of Light Source | LED |
| Power Input | 9W |
| System Lumen Output | 750 lm |
| System Efficacy | 83 lm/W |
| Power Voltage | 220-240V |
| Power Factor | 0.9 |
| Lifetime | 40000H(L70) |
| CCT | 3000K |
| CRI | 90 |
| SDCM | |
| Input Frequency | 50/60Hz |
| Dimming | Dimmable |
| Dimming Range | |
| UGR | |
| Glare Cut Angle | 90deg. |
| Beam Angle | 24deg. |
| Rotation Angle | |
| Tilt Angle | |
| IP code | 20 |
| IK code | |
| Ambient Temperature Range | -20 - 40°C |
| Surge Protection | |
| Classification of Luminaires | |
| THDi | |
| Effective Projected Area | |
| Driver | Integrated |
| Cut Out Size | 82mm |
| Dimensions | L82mm*H104mm |
| Weight | |
| Body | Aluminum Die Casting |
| Reflector | |
| Diffuser | Polycarbonate |
| Trim | |
| Casing | |
| Country of Origin | Indonesia |
| Brand | Panasonic |
| Remarks | White Frame |

Spec and certification may change without notice.

Others