
Panasonic




Certificates & Standards
RoHs

Dimension and Materials



Photometric Chart

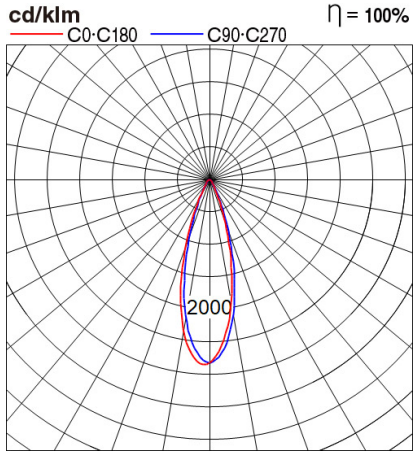

Ref. No.	
Type of Luminaire	Decorative Light
	Inground
	RGBW & Mono Color
Set Model No.	**NNP32360GL**

Type of Light Source	LED
Power Input	40W
System Lumen Output	2000 lm
System Efficacy	50 lm/W
Power Voltage	100-240V
Power Factor	
Lifetime	50000H(L70)
CCT	RGBWK
CRI	
SDCM	
Input Frequency	50/60Hz
Dimming	non-Dimmable
Dimming Range	
UGR	
Glare Cut Angle	
Beam Angle	30deg.
Rotation Angle	
Tilt Angle	
IP code	67
IK code	
Ambient Temperature Range	-25 - 50℃
Surge Protection	
Classification of Luminaries	
THDi	
Effective Projected Area	
Driver	
Cut Out Size	
Dimensions	L330mm*H260mm
Weight	0.8 kg
Body	Alumunium Aloy Molding
Reflector	
Diffuser	
Trim	
Casing	
Country of Origin	Indonesia
Brand	Panasonic
Remarks	

Spec and certification may change without notice.

Others

2026.10.15