
Panasonic




Certificates & Standards

Dimension and Materials



Photometric Chart

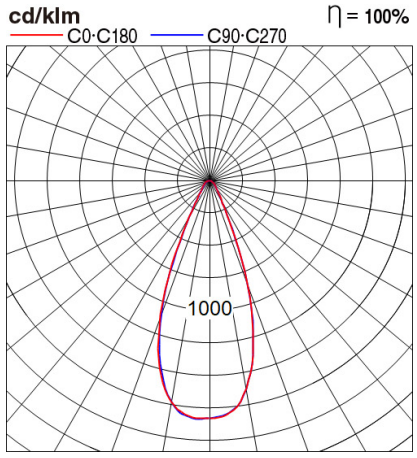

Ref. No.	
Type of Luminaire	Decorative Light
	Wall Up & Down
	Wall Up & Down
Set Model No.	**NNP45110**

Type of Light Source	LED
Power Input	36W
System Lumen Output	2520 lm
System Efficacy	70 lm/W
Power Voltage	100-240V
Power Factor	-
Lifetime	50000H(L70)
CCT	3000K
CRI	80
SDCM	
Input Frequency	50/60Hz
Dimming	non-Dimmable
Dimming Range	
UGR	
Glare Cut Angle	
Beam Angle	30deg.
Rotation Angle	
Tilt Angle	
IP code	66
IK code	
Ambient Temperature Range	30℃
Surge Protection	
Classification of Luminaries	
THDi	
Effective Projected Area	
Driver	Integrated
Cut Out Size	
Dimensions	L155mm*H215mm
Weight	
Body	Alumunium Die Casting
Reflector	
Diffuser	
Trim	
Casing	
Country of Origin	Indonesia
Brand	Panasonic
Remarks	Input current as of standard voltage (A): 0.21-0.95, Size: W155mm*L250mm*H215mm, The light emitting part: Round

Spec and certification may change without notice.

Others

2026.10.15