
Panasonic




Certificates & Standards

Dimension and Materials



Photometric Chart

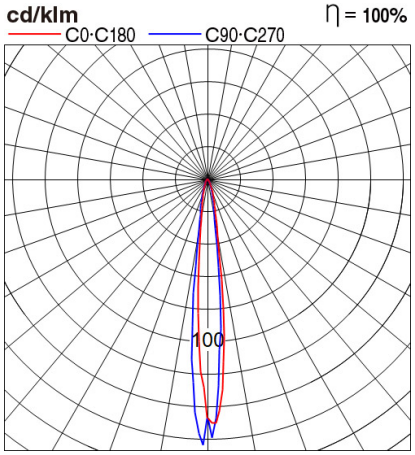

Ref. No.	
Type of Luminaire	Decorative Light
	Uplight Recessed
	Uplight Recessed
Set Model No.	**NNP57217**

Type of Light Source	LED
Power Input	32W
System Lumen Output	3400 lm
System Efficacy	106 lm/W
Power Voltage	220-240V
Power Factor	
Lifetime	50000H(L70)
CCT	4000K
CRI	80
SDCM	
Input Frequency	50/60Hz
Dimming	non-Dimmable
Dimming Range	
UGR	
Glare Cut Angle	
Beam Angle	10deg.
Rotation Angle	
Tilt Angle	
IP code	67
IK code	
Ambient Temperature Range	30℃
Surge Protection	
Classification of Luminaries	
THDi	
Effective Projected Area	
Driver	Integrated
Cut Out Size	
Dimensions	L300mm*H164mm
Weight	
Body	Aluminum Die Cast
Reflector	
Diffuser	
Trim	
Casing	
Country of Origin	Indonesia
Brand	Panasonic
Remarks	

Spec and certification may change without notice.

Others