





Certificates & Standards

RoHs

Dimension and Materials

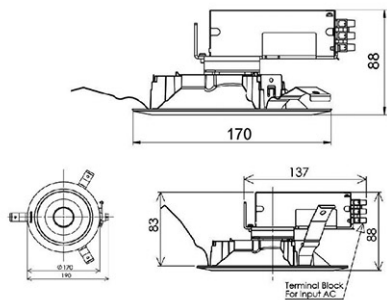

Photometric Chart

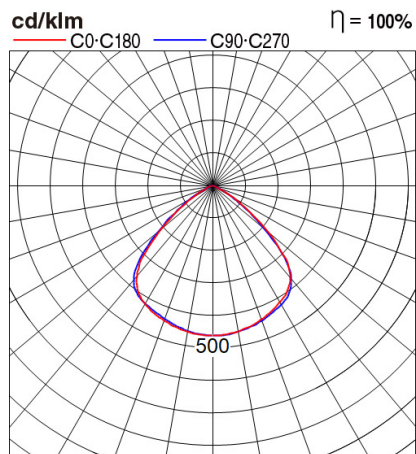

Ref. No.	
Type of Luminaire	Downlight
	Low Wattage Standard DL (Pro)
	I-Series
Set Model No.	NNP72431031
Type of Light Source	LED
Power Input	10.5W
System Lumen Output	1060 lm
System Efficacy	101 lm/W
Power Voltage	220-240V
Power Factor	0.9
Lifetime	40000H(L70)
CCT	4000K
CRI	80
SDCM	
Input Frequency	50/60Hz
Dimming	non-Dimmable
Dimming Range	
UGR	
Glare Cut Angle	15deg.
Beam Angle	45deg.
Rotation Angle	
Tilt Angle	
IP code	20
IK code	
Ambient Temperature Range	5° - 35°C
Surge Protection	
Classification of Luminaires	
THDi	
Effective Projected Area	
Driver	Integrated
Cut Out Size	170mm
Dimensions	170mm*88mm
Weight	0.41 kg
Body	Aluminium
Reflector	Aluminium
Diffuser	
Trim	
Casing	
Country of Origin	Indonesia
Brand	Panasonic
Remarks	Silver Specular

Spec and certification may change without notice.

Others