




Certificates & Standards

RoHs

Dimension and Materials

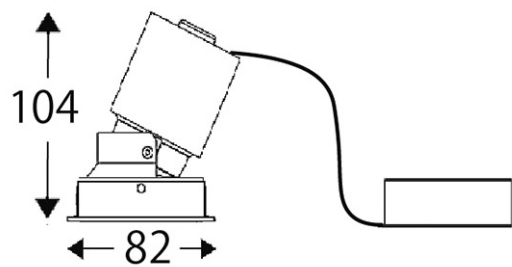

Photometric Chart

Ref. No.	
Type of Luminaire	Downlight
	Pin-hole DL
	Glareless Family (Pinhole DL)
Set Model No.	NNP73296K031
Type of Light Source	LED
Power Input	9W
System Lumen Output	380 lm
System Efficacy	42 lm/W
Power Voltage	220-240V
Power Factor	0.9
Lifetime	40000H(L70)
CCT	4000K
CRI	90
SDCM	
Input Frequency	50/60Hz
Dimming	Dimmable
Dimming Range	10-100%
UGR	
Glare Cut Angle	90deg.
Beam Angle	15deg.
Rotation Angle	
Tilt Angle	
IP code	20
IK code	
Ambient Temperature Range	-20° - 40°C
Surge Protection	
Classification of Luminaires	
THDi	
Effective Projected Area	
Driver	Integrated
Cut Out Size	82mm
Dimensions	82mm*98mm
Weight	
Body	ADC
Reflector	
Diffuser	Polycarbonate
Trim	
Casing	
Country of Origin	China
Brand	Panasonic
Remarks	

Others

Spec and certification may change without notice.