


Panasonic




Certificates & Standards

RoHS

Dimension and Materials

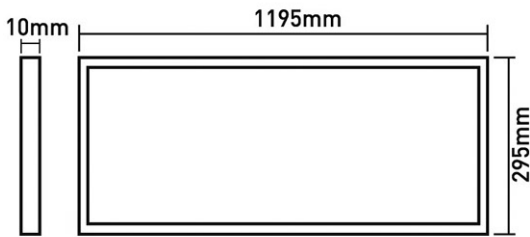

Photometric Chart

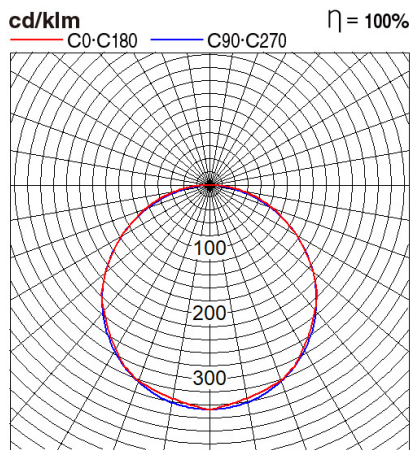

Ref. No.	
Type of Luminaire	Baselight Standard Baselight (Pro) Panel Light
Set Model No.	NNP86730K031
Type of Light Source	LED
Power Input	40W
System Lumen Output	3600 lm
System Efficacy	90 lm/W
Power Voltage	100-242V
Power Factor	0.9
Lifetime	50000H(L70)
CCT	4000K
CRI	80
SDCM	
Input Frequency	50/60Hz
Dimming	non-Dimmable
Dimming Range	
UGR	
Glare Cut Angle	30deg.
Beam Angle	120deg.
Rotation Angle	
Tilt Angle	
IP code	20
IK code	
Ambient Temperature Range	5 - 30°C
Surge Protection	
Classification of Luminaires	
THDi	
Effective Projected Area	
Driver	External
Cut Out Size	
Dimensions	295mm*1195mm*10mm
Weight	1.95 kg
Body	PC
Reflector	
Diffuser	
Trim	
Casing	
Country of Origin	China
Brand	Panasonic
Remarks	

Others

Spec and certification may change without notice.