


# Panasonic




## Certificates & Standards

RoHS

## Dimension and Materials

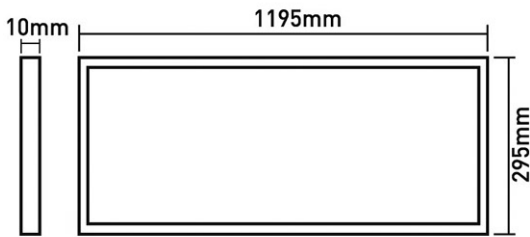

## Photometric Chart

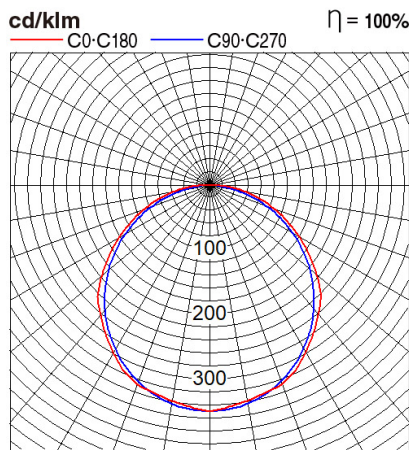

Ref. No.	
Type of Luminaire	Baselight Standard Baselight (Pro) Panel Light
Set Model No.	<b>NNP86740K031</b>
Type of Light Source	LED
Power Input	30W
System Lumen Output	3300 lm
System Efficacy	110 lm/W
Power Voltage	100-242V
Power Factor	0.9
Lifetime	50000H(L70)
CCT	6500K
CRI	80
SDCM	
Input Frequency	50/60Hz
Dimming	non-Dimmable
Dimming Range	
UGR	
Glare Cut Angle	30deg.
Beam Angle	120deg.
Rotation Angle	
Tilt Angle	
IP code	20
IK code	
Ambient Temperature Range	5 - 30°C
Surge Protection	
Classification of Luminaires	
THDi	
Effective Projected Area	
Driver	External
Cut Out Size	
Dimensions	295mm*1195mm*10mm
Weight	1.95 kg
Body	PC
Reflector	
Diffuser	
Trim	
Casing	
Country of Origin	China
Brand	Panasonic
Remarks	

## Others

Spec and certification may change without notice.