



Panasonic

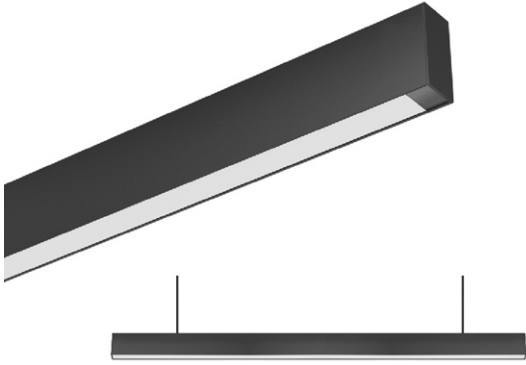

Certificates & Standards

RoHs

Dimension and Materials

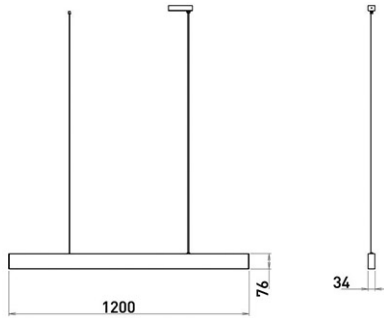

Photometric Chart

| | |
|------------------------------|---|
| Ref. No. | |
| Type of Luminaire | Baselight Linear Light Pendant Linear |
| Set Model No. | NNP94410031 |
| Type of Light Source | LED |
| Power Input | 20W |
| System Lumen Output | 1485 lm |
| System Efficacy | |
| Power Voltage | 100-240V |
| Power Factor | |
| Lifetime | 50000H(L70) |
| CCT | 3000K |
| CRI | 90 |
| SDCM | |
| Input Frequency | 50/60Hz |
| Dimming | non-Dimmable |
| Dimming Range | |
| UGR | |
| Glare Cut Angle | 45deg. |
| Beam Angle | 90deg. |
| Rotation Angle | |
| Tilt Angle | |
| IP code | 20 |
| IK code | |
| Ambient Temperature Range | -20 - 40°C |
| Surge Protection | |
| Classification of Luminaires | |
| THDi | |
| Effective Projected Area | |
| Driver | Integrated |
| Cut Out Size | |
| Dimensions | 34mm*1200mm*76mm |
| Weight | |
| Body | Aluminium Extrusion |
| Reflector | |
| Diffuser | |
| Trim | |
| Casing | |
| Country of Origin | China |
| Brand | Panasonic |
| Remarks | |

Spec and certification may change without notice.

Others