


# Panasonic




## Certificates & Standards

RoHS

## Dimension and Materials

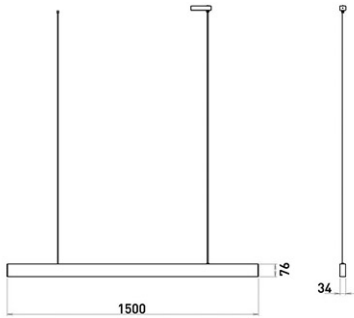

## Photometric Chart

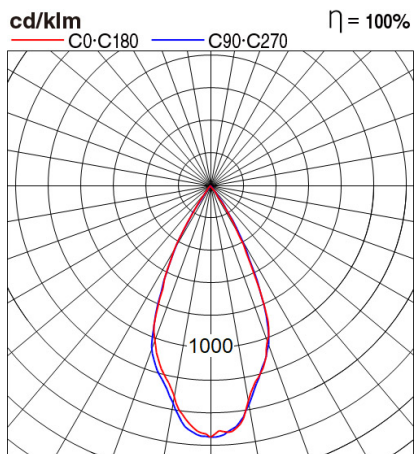

Ref. No.	
Type of Luminaire	Baselight Linear Light Pendant Linear
Set Model No.	<b>NNP95411031</b>
Type of Light Source	LED
Power Input	30W
System Lumen Output	2400 lm
System Efficacy	80 lm/W
Power Voltage	220-240V
Power Factor	0.9
Lifetime	50000H(L70)
CCT	3000K
CRI	90
SDCM	
Input Frequency	50/60Hz
Dimming	non-Dimmable
Dimming Range	
UGR	
Glare Cut Angle	71deg.
Beam Angle	38deg.
Rotation Angle	
Tilt Angle	
IP code	44
IK code	
Ambient Temperature Range	-20 - 40°C
Surge Protection	
Classification of Luminaires	
THDi	
Effective Projected Area	
Driver	Integrated
Cut Out Size	
Dimensions	W34mm*L1500mm*H76mm
Weight	2.5 kg
Body	Aluminium Extrusion
Reflector	
Diffuser	
Trim	
Casing	
Country of Origin	China
Brand	Panasonic
Remarks	

Spec and certification may change without notice.

## Others