




### Certificates & Standards

#### Dimension and Materials

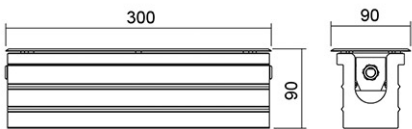

#### Photometric Chart

|                              |                                      |
|------------------------------|--------------------------------------|
| Ref. No.                     |                                      |
| Type of Luminaire            | Decorative Light                     |
|                              | Decorative Light                     |
|                              | Wall Washer RGBW & Mono Color        |
| Set Model No.                | <b>NNP96510</b>                      |
| Type of Light Source         |                                      |
| Power Input                  | 9W                                   |
| System Lumen Output          | 310 lm                               |
| System Efficacy              | 34 lm/W                              |
| Power Voltage                | 220-240V                             |
| Power Factor                 | 0.5                                  |
| Lifetime                     | 50000H(L70)                          |
| CCT                          | Color Changes : 2700-6500K           |
| CRI                          | 80                                   |
| SDCM                         |                                      |
| Input Frequency              | 50/60Hz                              |
| Dimming                      | non-Dimmable                         |
| Dimming Range                |                                      |
| UGR                          |                                      |
| Glare Cut Angle              |                                      |
| Beam Angle                   | 30deg.                               |
| Rotation Angle               |                                      |
| Tilt Angle                   |                                      |
| IP code                      | 67                                   |
| IK code                      |                                      |
| Ambient Temperature Range    | 30°C                                 |
| Surge Protection             |                                      |
| Classification of Luminaires |                                      |
| THDi                         |                                      |
| Effective Projected Area     |                                      |
| Driver                       | Integrated                           |
| Cut Out Size                 |                                      |
| Dimensions                   | 90mm*300mm*90mm                      |
| Weight                       | 1.88 kg                              |
| Body                         | Profile Alumunium + Tempered Glass   |
| Reflector                    |                                      |
| Diffuser                     |                                      |
| Trim                         |                                      |
| Casing                       |                                      |
| Country of Origin            | Indonesia                            |
| Brand                        | Panasonic                            |
| Remarks                      | Tunable White, Beam Angle: 17° X 30° |

Spec and certification may change without notice.

#### Others