


Panasonic




Certificates & Standards

RoHs / TISI

Dimension and Materials

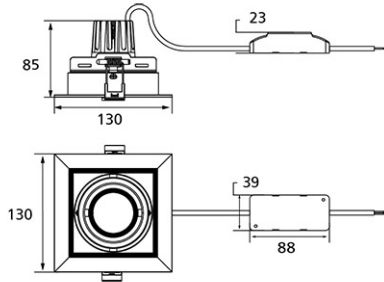

Photometric Chart

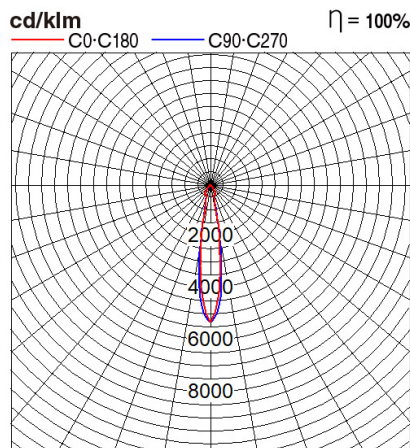

| | |
|------------------------------|----------------------------|
| Ref. No. | |
| Type of Luminaire | Downlight |
| | System DL |
| | Others (Simple) |
| Set Model No. | NNV70121WE1A |
| Type of Light Source | LED |
| Power Input | 11W |
| System Lumen Output | 900 lm |
| System Efficacy | 82 lm/W |
| Power Voltage | 220-240V |
| Power Factor | 0.95 |
| Lifetime | 50000H(L70) |
| CCT | 4000K |
| CRI | 80 |
| SDCM | <5 |
| Input Frequency | 50/60Hz |
| Dimming | non-Dimmable |
| Dimming Range | |
| UGR | |
| Glare Cut Angle | |
| Beam Angle | 15deg. |
| Rotation Angle | |
| Tilt Angle | |
| IP code | 20 |
| IK code | |
| Ambient Temperature Range | 5 - 35°C |
| Surge Protection | |
| Classification of Luminaires | Class II |
| THDi | |
| Effective Projected Area | |
| Driver | External |
| Cut Out Size | |
| Dimensions | 130mm*130mm*85mm |
| Weight | 0.31 kg |
| Body | ADC(Black) |
| Reflector | Aluminium(Gray) |
| Diffuser | PC(Transparent) |
| Trim | Aluminium(White) |
| Casing | |
| Country of Origin | China |
| Brand | Panasonic |
| Remarks | Cut Out Size : 110mm*110mm |

Spec and certification may change without notice.

Others