


Panasonic




Certificates & Standards

RoHs / TISI

Dimension and Materials

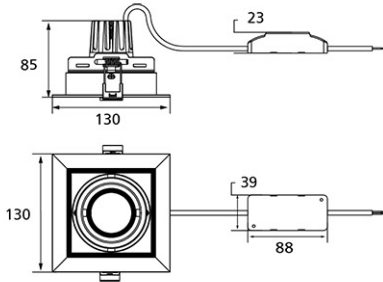

Photometric Chart

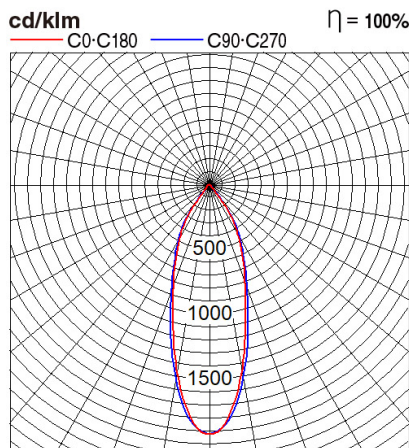

Ref. No.	
Type of Luminaire	Downlight
	System DL
	Others (Simple)
Set Model No.	NNV70128WE1A
Type of Light Source	LED
Power Input	6W
System Lumen Output	550 lm
System Efficacy	92 lm/W
Power Voltage	220-240V
Power Factor	0.95
Lifetime	50000H(L70)
CCT	4000K
CRI	80
SDCM	<5
Input Frequency	50/60Hz
Dimming	non-Dimmable
Dimming Range	
UGR	
Glare Cut Angle	
Beam Angle	36deg.
Rotation Angle	
Tilt Angle	
IP code	20
IK code	
Ambient Temperature Range	5 - 35°C
Surge Protection	
Classification of Luminaires	Class II
THDi	
Effective Projected Area	
Driver	External
Cut Out Size	
Dimensions	130mm*130mm*85mm
Weight	0.31 kg
Body	ADC(Black)
Reflector	Aluminium(Gray)
Diffuser	PC(Transparent)
Trim	Aluminium(White)
Casing	
Country of Origin	China
Brand	Panasonic
Remarks	Cut Out Size : 110mm*110mm

Spec and certification may change without notice.

Others