


# Panasonic




## Certificates & Standards

RoHS

## Dimension and Materials

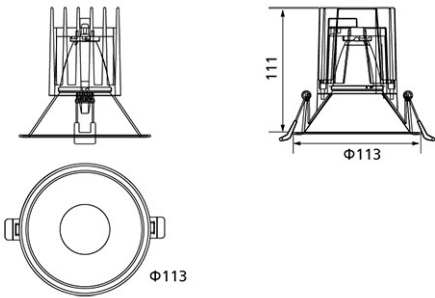

## Photometric Chart

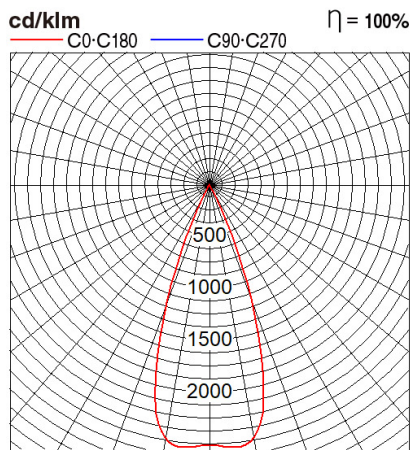

Ref. No.	
Type of Luminaire	Downlight
	Soft Glare DL
	Soft Glare DL
Set Model No.	<b>NNV70672WE1A</b>
Type of Light Source	LED
Power Input	20W
System Lumen Output	1900 lm
System Efficacy	95 lm/W
Power Voltage	220-240V
Power Factor	0.95
Lifetime	50000H(L70)
CCT	3000K
CRI	80
SDCM	<3
Input Frequency	50/60Hz
Dimming	non-Dimmable
Dimming Range	
UGR	
Glare Cut Angle	30deg.
Beam Angle	36deg.
Rotation Angle	
Tilt Angle	
IP code	20
IK code	
Ambient Temperature Range	5 - 35°C
Surge Protection	
Classification of Luminaires	Class II
THDi	<10%
Effective Projected Area	
Driver	External
Cut Out Size	100mm
Dimensions	113mm*111mm
Weight	0.42 kg
Body	ADC(Black)
Reflector	PC(White)
Diffuser	PC(Transparent)
Trim	ADC(White)
Casing	
Country of Origin	China
Brand	Panasonic
Remarks	

Spec and certification may change without notice.

## Others