


# Panasonic




## Certificates & Standards

RoHs / CISPR15 / TISI / CR

## Dimension and Materials

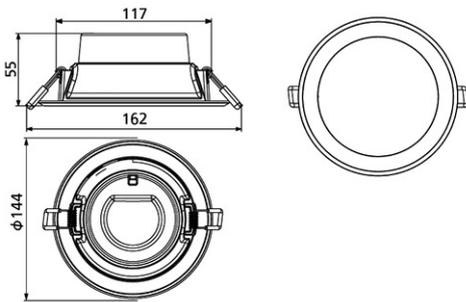

## Photometric Chart

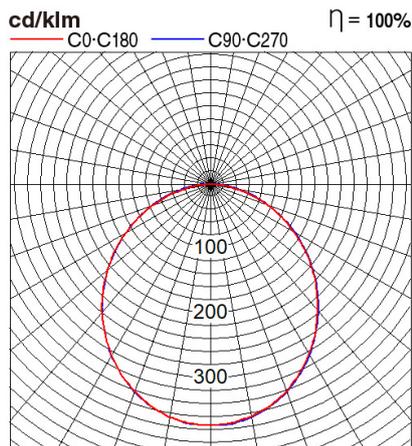

Ref. No.	
Type of Luminaire	Downlight
	Low Wattage Standard DL (Pro)
	SP
Set Model No.	<b>NNV71007WE1A</b>
Type of Light Source	LED
Power Input	12W
System Lumen Output	1200 lm
System Efficacy	100 lm/W
Power Voltage	220-240V
Power Factor	0.9
Lifetime	50000H(L70)
CCT	4000K
CRI	80
SDCM	<5
Input Frequency	50/60Hz
Dimming	non-Dimmable
Dimming Range	
UGR	
Glare Cut Angle	
Beam Angle	100deg.
Rotation Angle	
Tilt Angle	
IP code	20
IK code	IK 03
Ambient Temperature Range	5 - 35°C
Surge Protection	
Classification of Luminaires	Class II
THDi	
Effective Projected Area	
Driver	Integrated
Cut Out Size	125mm
Dimensions	L144mm*H55mm
Weight	0.16 kg
Body	PBT(White)
Reflector	
Diffuser	PC
Trim	
Casing	
Country of Origin	China
Brand	Panasonic
Remarks	Cut-out size: $\Phi$ 125mm

Spec and certification may change without notice.

## Others