





Certificates & Standards

RoHs / TISI

Dimension and Materials

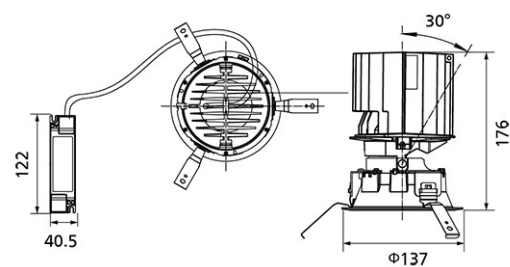

Photometric Chart

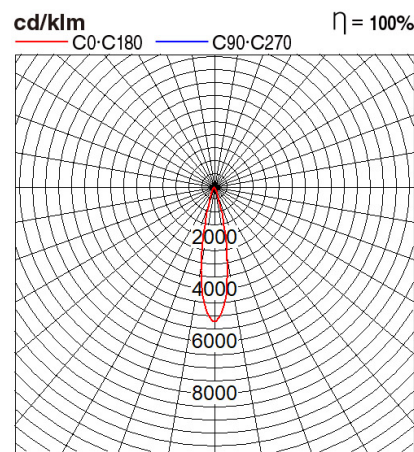

Ref. No.	
Type of Luminaire	Downlight
	Glareless + Adjustable DL
	Ex-F
Set Model No.	NNV72417WE1A
Type of Light Source	LED
Power Input	42W
System Lumen Output	2860 lm
System Efficacy	68 lm/W
Power Voltage	220V
Power Factor	0.95
Lifetime	50000H(L70)
CCT	3000K
CRI	85
SDCM	<5
Input Frequency	50/60Hz
Dimming	non-Dimmable
Dimming Range	
UGR	
Glare Cut Angle	
Beam Angle	25deg.
Rotation Angle	355deg.
Tilt Angle	30deg.
IP code	20
IK code	
Ambient Temperature Range	5 - 35°C
Surge Protection	
Classification of Luminaires	Class II
THDi	
Effective Projected Area	
Driver	External
Cut Out Size	125mm
Dimensions	137mm*176mm
Weight	2.2 kg
Body	ADC(White)
Reflector	Aluminum
Diffuser	PMMA(Transparent)
Trim	ADC(White)
Casing	
Country of Origin	China
Brand	Panasonic
Remarks	

Spec and certification may change without notice.

Others