


Panasonic




Certificates & Standards

RoHs

Dimension and Materials

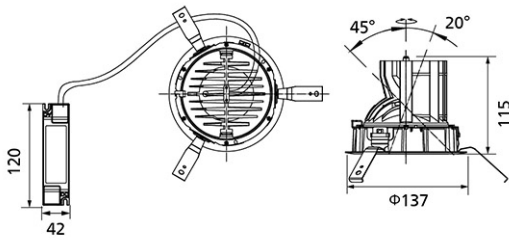

Photometric Chart

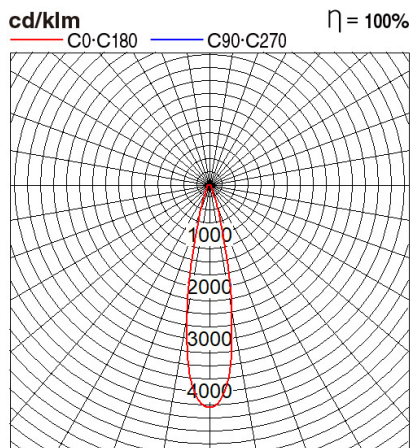

| | |
|------------------------------|---------------------|
| Ref. No. | |
| Type of Luminaire | Downlight |
| | Adjustable DL |
| | Ex-F |
| Set Model No. | NNV74802WE1A |
| Type of Light Source | LED |
| Power Input | 17W |
| System Lumen Output | 1830 lm |
| System Efficacy | 108 lm/W |
| Power Voltage | 220V |
| Power Factor | 0.95 |
| Lifetime | 50000H(L70) |
| CCT | 3000K |
| CRI | 85 |
| SDCM | <5 |
| Input Frequency | 50/60Hz |
| Dimming | non-Dimmable |
| Dimming Range | |
| UGR | |
| Glare Cut Angle | |
| Beam Angle | 25deg. |
| Rotation Angle | 355deg. |
| Tilt Angle | 20deg. |
| IP code | 20 |
| IK code | |
| Ambient Temperature Range | 5 - 35°C |
| Surge Protection | |
| Classification of Luminaires | Class II |
| THDi | |
| Effective Projected Area | |
| Driver | External |
| Cut Out Size | 125mm |
| Dimensions | 137mm*115mm |
| Weight | 1.8 kg |
| Body | ADC(White) |
| Reflector | |
| Diffuser | PMMA(Transparent) |
| Trim | ADC(White) |
| Casing | |
| Country of Origin | China |
| Brand | Panasonic |
| Remarks | |

Spec and certification may change without notice.

Others