


Certificates & Standards

CB / RoHs / TISI

Dimension and Materials

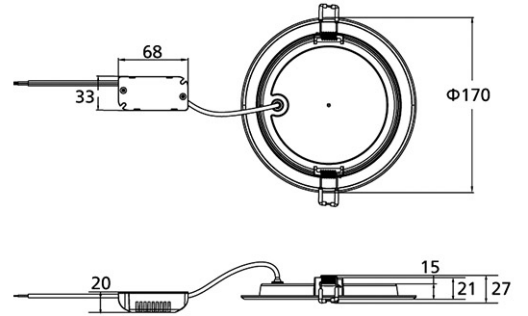

Photometric Chart

Ref. No.	
Type of Luminaire	Downlight
	Panel Light
	Panel light (Hero)
Set Model No.	NNV79965WE1A
Type of Light Source	LED
Power Input	12W
System Lumen Output	960 lm
System Efficacy	80 lm/W
Power Voltage	220-240V
Power Factor	0.5
Lifetime	
CCT	6500K
CRI	80
SDCM	<6
Input Frequency	50/60Hz
Dimming	non-Dimmable
Dimming Range	
UGR	
Glare Cut Angle	
Beam Angle	110deg.
Rotation Angle	
Tilt Angle	
IP code	20
IK code	
Ambient Temperature Range	5 - 35°C
Surge Protection	L-N:0.5kV
Classification of Luminaires	Class II
THDi	
Effective Projected Area	
Driver	External
Cut Out Size	160mm
Dimensions	W170mm*L170mm*H23mm
Weight	0.113 kg
Body	PP(White)
Reflector	
Diffuser	
Trim	PP(White)
Casing	
Country of Origin	China
Brand	Panasonic
Remarks	Cut-out size:155-160

Spec and certification may change without notice.

Others