





Certificates & Standards

RoHs / TISI

Dimension and Materials

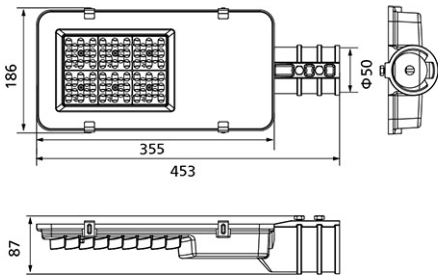

Photometric Chart

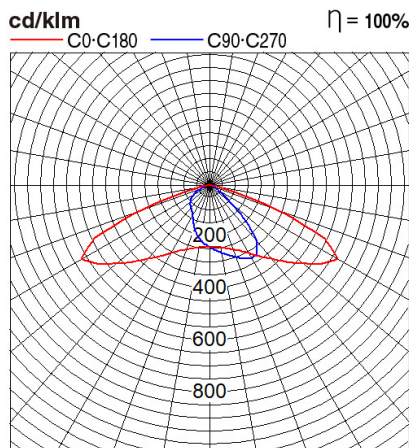

| | |
|------------------------------|-----------------------------|
| Ref. No. | |
| Type of Luminaire | Street Light |
| | Standard Street Light (Pro) |
| | SP Street Light |
| Set Model No. | NNYC2006288 |
| Type of Light Source | LED |
| Power Input | 60W |
| System Lumen Output | 7500 lm |
| System Efficacy | 125 lm/W |
| Power Voltage | 220-240V |
| Power Factor | 0.9 |
| Lifetime | 50000H(L70) |
| CCT | 5700K |
| CRI | 70 |
| SDCM | |
| Input Frequency | 50/60Hz |
| Dimming | non-Dimmable |
| Dimming Range | |
| UGR | |
| Glare Cut Angle | |
| Beam Angle | 120deg. |
| Rotation Angle | |
| Tilt Angle | |
| IP code | 65 |
| IK code | |
| Ambient Temperature Range | 5 - 45°C |
| Surge Protection | 10kV |
| Classification of Luminaires | Class I |
| THDi | |
| Effective Projected Area | |
| Driver | Integrated |
| Cut Out Size | |
| Dimensions | 186mm*453mm*87mm |
| Weight | 2.32 kg |
| Body | ADC12 |
| Reflector | Glass |
| Diffuser | |
| Trim | |
| Casing | |
| Country of Origin | China |
| Brand | Panasonic |
| Remarks | |

Spec and certification may change without notice.

Others