


# Panasonic




## Certificates & Standards

RoHs / TISI

## Dimension and Materials

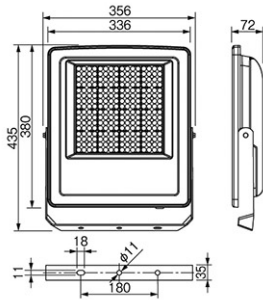

## Photometric Chart

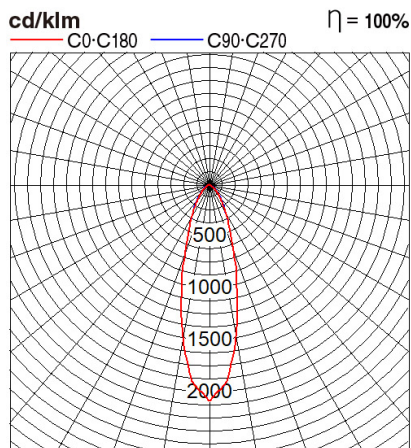

Ref. No.	
Type of Luminaire	Floodlight
	Standard Floodlight (Pro)
	Ex
Set Model No.	<b>NNYC20213K7</b>
Type of Light Source	LED
Power Input	200W
System Lumen Output	24000 lm
System Efficacy	120 lm/W
Power Voltage	220-240V
Power Factor	0.9
Lifetime	50000H(L70)
CCT	3000K
CRI	70
SDCM	<5
Input Frequency	50/60Hz
Dimming	non-Dimmable
Dimming Range	
UGR	
Glare Cut Angle	
Beam Angle	30deg.
Rotation Angle	
Tilt Angle	
IP code	66
IK code	
Ambient Temperature Range	-40 - 50°C
Surge Protection	10kV
Classification of Luminaires	Class I
THDi	
Effective Projected Area	
Driver	Integrated
Cut Out Size	
Dimensions	356mm*435mm*72mm
Weight	5.4 kg
Body	ADC(Gray)
Reflector	
Diffuser	Glass(Transparent)
Trim	
Casing	
Country of Origin	China
Brand	Panasonic
Remarks	

Spec and certification may change without notice.

## Others