


Panasonic



Certificates & Standards

RoHs

Dimension and Materials

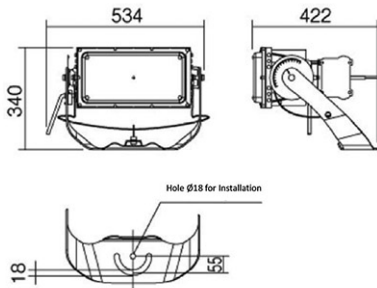

Photometric Chart

Ref. No.	
Type of Luminaire	Floodlight Standard Floodlight (Pro) High Lumen Stadium Light
Set Model No.	NYS12317LD2031
Type of Light Source	LED
Power Input	251W
System Lumen Output	35800 lm
System Efficacy	
Power Voltage	200-242V
Power Factor	
Lifetime	40000H(L70)
CCT	5000K
CRI	70
SDCM	
Input Frequency	50/60Hz
Dimming	non-Dimmable
Dimming Range	
UGR	
Glare Cut Angle	77deg.
Beam Angle	27deg.
Rotation Angle	
Tilt Angle	
IP code	65
IK code	
Ambient Temperature Range	-20 - 35°C
Surge Protection	
Classification of Luminaires	
THDi	
Effective Projected Area	
Driver	Integrated
Cut Out Size	
Dimensions	422mm*534mm*340mm
Weight	
Body	ADC
Reflector	
Diffuser	
Trim	
Casing	
Country of Origin	Japan
Brand	Panasonic
Remarks	

Spec and certification may change without notice.

Others