


# Panasonic



## Certificates & Standards

RoHs

## Dimension and Materials

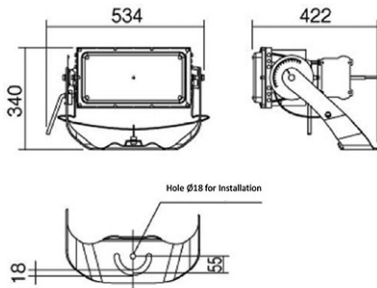

## Photometric Chart

|                              |   |
|------------------------------|---|
| Ref. No.                     |   |
| Type of Luminaire            | Floodlight<br>Standard Floodlight (Pro)<br>High Lumen Stadium Light |
| Set Model No.                | <b>NYS12337LD2031</b>   |
| Type of Light Source         | LED   |
| Power Input                  | 267W  |
| System Lumen Output          | 40400 lm  |
| System Efficacy              |   |
| Power Voltage                | 200-242V  |
| Power Factor                 |   |
| Lifetime                     | 40000H(L70)   |
| CCT                          | 5000K   |
| CRI                          | 70  |
| SDCM                         |   |
| Input Frequency              | 50/60Hz   |
| Dimming                      | non-Dimmable  |
| Dimming Range                |   |
| UGR                          |   |
| Glare Cut Angle              | 64deg.  |
| Beam Angle                   | 53deg.  |
| Rotation Angle               |   |
| Tilt Angle                   |   |
| IP code                      | 65  |
| IK code                      |   |
| Ambient Temperature Range    | -20 - 35°C  |
| Surge Protection             |   |
| Classification of Luminaires |   |
| THDi                         |   |
| Effective Projected Area     |   |
| Driver                       | Integrated  |
| Cut Out Size                 |   |
| Dimensions                   | 422mm*534mm*340mm   |
| Weight                       |   |
| Body                         | ADC   |
| Reflector                    |   |
| Diffuser                     |   |
| Trim                         |   |
| Casing                       |   |
| Country of Origin            | Japan   |
| Brand                        | Panasonic   |
| Remarks                      |   |

Spec and certification may change without notice.

## Others