



# Panasonic

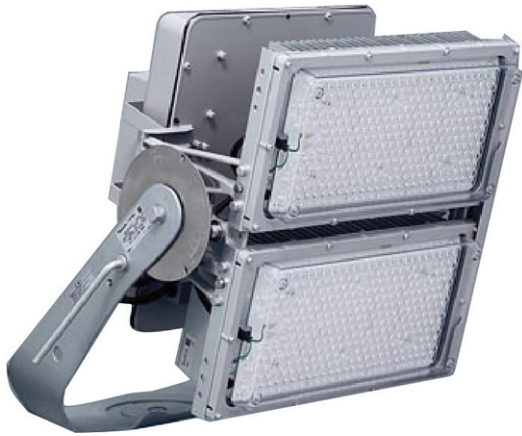

## Certificates & Standards

RoHS

## Dimension and Materials

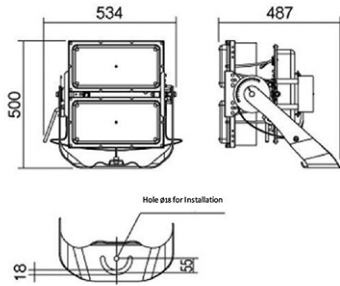

## Photometric Chart

Ref. No.	
Type of Luminaire	Floodlight Standard Floodlight (Pro) High Lumen Stadium Light
Set Model No.	<b>NYS12547LD2031</b>
Type of Light Source	LED
Power Input	432W
System Lumen Output	65500 lm
System Efficacy	
Power Voltage	200-242V
Power Factor	
Lifetime	40000H(L70)
CCT	5000K
CRI	70
SDCM	
Input Frequency	50/60Hz
Dimming	non-Dimmable
Dimming Range	
UGR	
Glare Cut Angle	54deg.
Beam Angle	34deg.
Rotation Angle	
Tilt Angle	
IP code	65
IK code	
Ambient Temperature Range	-20 - 35°C
Surge Protection	
Classification of Luminaires	
THDi	
Effective Projected Area	
Driver	Integrated
Cut Out Size	
Dimensions	487mm*534mm*500mm
Weight	
Body	ADC
Reflector	
Diffuser	
Trim	
Casing	
Country of Origin	Japan
Brand	Panasonic
Remarks	

Spec and certification may change without notice.

## Others